



Millie Modular System

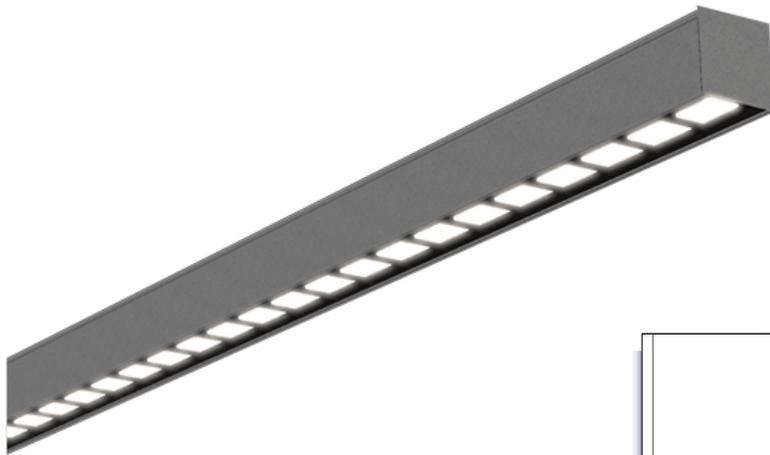

- Low glare UGR <19
- IP20 suitable for internal environments
- Efficacy of up to 140lm/W
- Nominal life-time of 72,000 h (L80/B10)
- Colour stability with 3 step MacAdam
- Impact rating of IK04

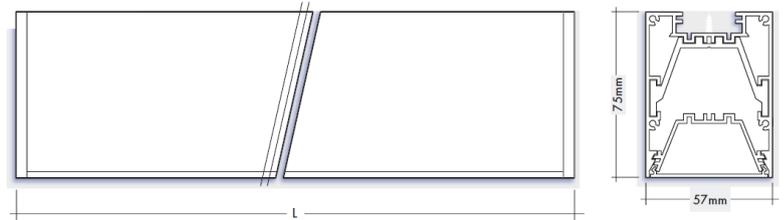


To Specify:

Select Part Number with additional options if required
 e.g. **MIL/S/H6/MOD/4300/4/BLK/DIM**
 = Millie, Surface/Suspended, 1680mm, Modular optics, 4296lm, 31W, 4000K, Black RAL 9005 finish, DALI dimmable

Part No.	W	lm	lm/W
MIL/S/H1/MOD/2326/4	18	2330	129
MIL/S/H1/MOD/2860/4	22	2864	130
MIL/S/H4/MOD/2910/4	22	2908	132
MIL/S/H4/MOD/3580/4	26	3580	138
MIL/S/H6/MOD/3490/4	25	3489	140
MIL/S/H6/MOD/4300/4	31	4296	139

Direct

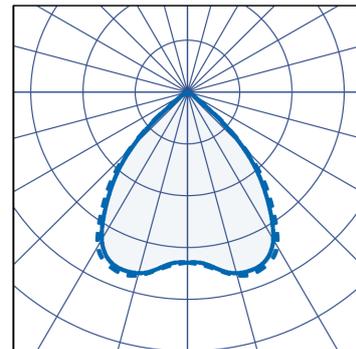


Options

- For Surface/Suspended suffix
- For Recessed suffix
- For Black suffix
- For White suffix
- For DALI Dimmable suffix
- For Self-Contained 3hr emergency suffix
- For 3hr Self-test emergency suffix
- For DALI EM-PRO 3hr emergency
- Integral Sensor

- /S
- /R
- /B
- /W
- /DIM
- /EMR
- /ST
- /EMP
- /SEN

Direct/In-Direct

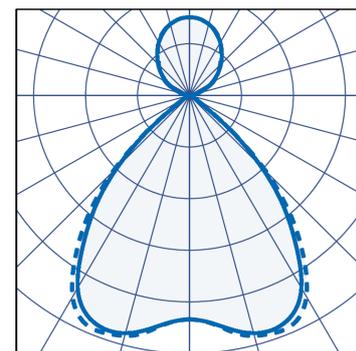

Accessories

- For suspended / surface end cap
- For wire suspension kit (2m)
- For wall mounting bracket
- For coupler

- MIL/ECS
- MIL/WIRE
- MIL/WALL
- MIL/CPLR

