


Millie Surface Opal System



- Body and gear tray - aluminium extrusion
- IP20 as standard, IP44 available on request
- Efficacy of up to 161lm/W
- Nominal life-time of 100,000 h (L80/B10)
- Colour stability with 3 step MacAdam
- Opal frosted diffuser - polycarbonate TP(a)
- Optics - PMMA TP(b)
- Modular optics - shade polycarbonate, optic - PMMA
- Colours: RAL 9003 White, RAL 9005 Black & RAL 9006 Grey
- Lengths available: 570mm, 850mm, 1130mm, 1410mm, 1690mm, 1970mm, 2250mm, 2530mm, 2810mm, 3090mm, 3370mm

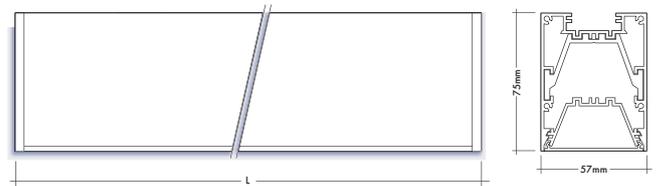


To Specify:

Select Part Number with additional options if required


e.g. **MIL/S/16/OP/3925/4/BLK/DIM**

= Millie, Surface, 1690mm, Opal, 3925lm, 28W, 4000K, Black RAL 9005 finish, DALI dimmable

Part No.	Lm	W	Lm/W	BLF	Weight	L (mm)	Options
MIL/S/11/OP/1307/4	1307	9	140	413	2.6kg	1130	For 4000K suffix For 3000K suffix
MIL/S/11/OP/2616/4	2616	19	137	413	2.6kg	1130	For white finish suffix For black finish suffix
MIL/S/11/OP/3836/4	3836	29	132	413	2.6kg	1130	For grey finish suffix For Casambi enabled suffix
MIL/S/16/OP/1961/4	1961	14	136	416	3.8kg	1690	For DALI Dimmable suffix For wireless DALI suffix
MIL/S/16/OP/3925/4	3925	28	137	416	3.8kg	1690	For 3hr integral emergency suffix For 3hr self-test emergency suffix
MIL/S/16/OP/5753/4	5753	43	132	416	3.8kg	1690	For DALI addressable emergency suffix For wireless DALI addressable emergency
MIL/S/22/OP/2614/4	2614	18	140	417	5.2kg	2250	For 90° low glare optic For Asymmetric wall wash optic
MIL/S/22/OP/5232/4	5232	38	137	417	5.2kg	2250	For Double asymmetric optic Integral Sensor
MIL/S/22/OP/7671/4	7671	58	132	417	5.2kg	2250	

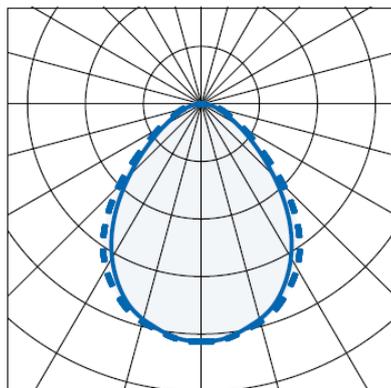

Fitting Lengths (mm)

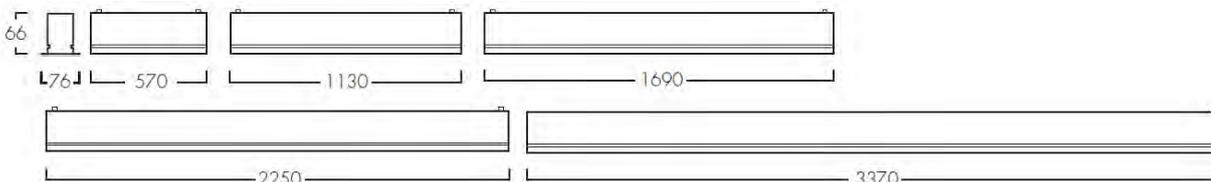

Accessories


- Suspended / Surface end cap
- Wire suspension kit (2m)
- Wall mounting bracket
- Coupler

/MIL/ECR
/MIL/WIRE
/MIL/WALL
/MIL/CPLR

Millie Surface Microprismatic System




- Body and gear tray - aluminium extrusion
- IP20 as standard, IP44 available on request
- Efficacy of up to 161lm/W
- Nominal life-time of 100,000 h (L80/B10)
- Colour stability with 3 step MacAdam
- Opal frosted diffuser - polycarbonate TP(a)
- Optics - PMMA TP(b)
- Modular optics - shade polycarbonate, optic - PMMA
- Colours: RAL 9003 White, RAL 9005 Black & RAL 9006 Grey
- Lengths available: 570mm, 850mm, 1130mm, 1410mm, 1690mm, 1970mm, 2250mm, 2530mm, 2810mm, 3090mm, 3370mm

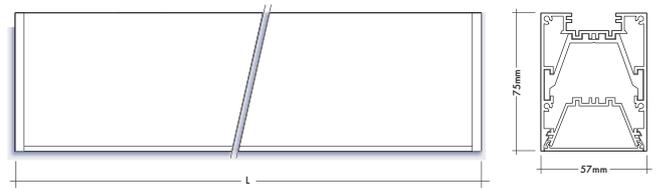


To Specify:

Select Part Number with additional options if required
 e.g. **MIL/S/22/MP/2544/4/BLK/DIM**
 = Millie, Surface, 2250mm, Microprismatic, 2544lm, 18W, 4000K,
 Black RAL 9005 finish, DALI dimmable

Part No.	Lm	W	Lm/W	Weight	L (mm)	Options
MIL/S/11/MP/1272/4	1272	9	136	2.6kg	1130	For 4000K suffix /4 For 3000K suffix /3
MIL/S/11/MP/2546/4	2546	19	133	2.6kg	1130	For white finish suffix /WHI For black finish suffix /BLK For grey finish suffix /GRY
MIL/S/11/MP/3732/4	3732	29	128	2.6kg	1130	For Casambi enabled suffix /CAS
MIL/S/16/MP/1908/4	1908	14	132	3.8kg	1690	For DALI Dimmable suffix /DIM For wireless DALI suffix /WD
MIL/S/16/MP/3819/4	3819	28	133	3.8kg	1690	For 3hr integral emergency suffix /EMR For 3hr self-test emergency suffix /ST
MIL/S/16/MP/5598/4	5598	43	128	3.8kg	1690	For DALI addressable emergency suffix /EMP
MIL/S/22/MP/2544/4	2544	18	136	5.2kg	2250	For wireless DALI addressable emergency /WAE For 90° low glare optic /90
MIL/S/22/MP/5091/4	5091	38	133	5.2kg	2250	For Asymmetric wall wash optic /AS For Double asymmetric optic /DA
MIL/S/22/MP/7464/4	7464	58	128	5.2kg	2250	Integral Sensor /SEN

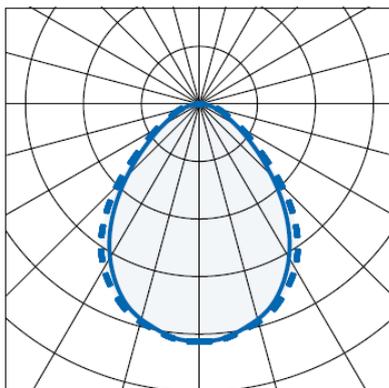

Fitting Lengths (mm)

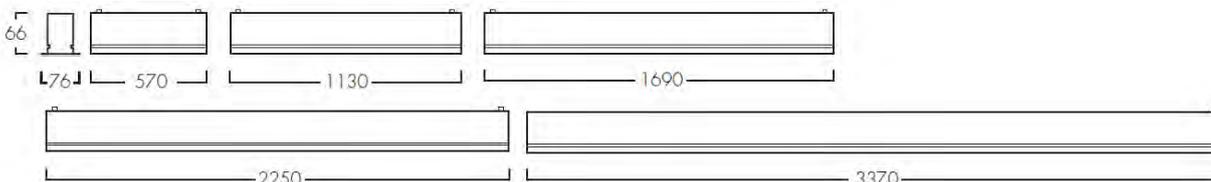

Accessories

- Suspended / Surface end cap /MIL/ECR
- Wire suspension kit (2m) /MIL/WIRE
- Wall mounting bracket /MIL/WALL
- Coupler /MIL/CPLR