


# Molly Pendant



- IP20 suitable for internal environments
- Impact rating of IK04
- Efficacy of up to 110lm/W
- Nominal life-time of 60,000 h (L70/B10)
- Colour stability with 3 step MacAdam
- High colour rendering index CRI > 90

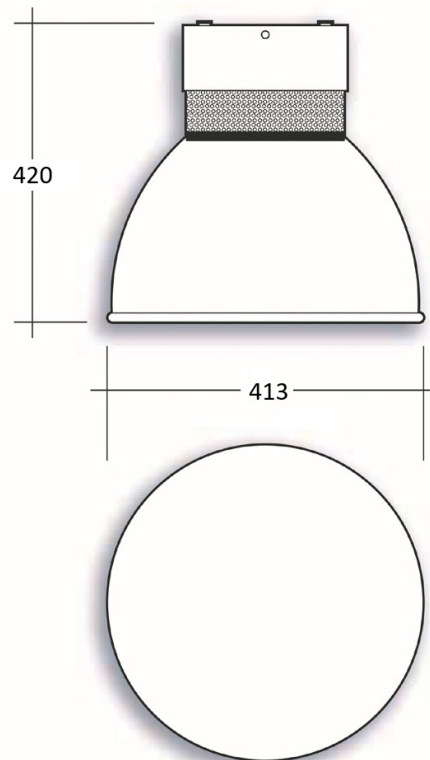

## To Specify:

Select Part Number with additional options if required

e.g. **MOL/3000/40/DIM/GRY**

= Molly LED hibay, 3000lm, 4000K, DALI dimmable c/w grey housing.

| Part No.        | W  | lm   | lm/W | D(mm) |
|-----------------|----|------|------|-------|
| <b>MOL/1100</b> | 10 | 1100 | 110  | ø600  |
| <b>MOL/2075</b> | 20 | 2075 | 103  | ø600  |
| <b>MOL/2975</b> | 30 | 2975 | 99   | ø600  |
| <b>MOL/4550</b> | 46 | 4550 | 98   | ø1200 |

## Options

For 3000K colour temperature suffix  
 For 4000K colour temperature suffix  
 For DALI Dimmable suffix  
 For white gear housing suffix  
 For grey gear housing suffix  
 For black gear housing suffix

**/3**  
**/4**  
**/DIM**  
**/WHI**  
**/GRY**  
**/BLK**

