






TR2 LED Emergency Downlight




- IP20 suitable for internal environments
- Impact rating of IK04
- Efficacy of up to 109lm/W
- Nominal life-time of 50,000 h (L90/B10)
- Colour stability with 3 step MacAdam

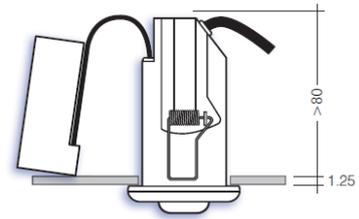


Corridor



Spot



Open Area



To Specify:

Select Part Number with additional options if required
e.g. **TR2/2/NM/DALI/OA**

= TR2 LED emergency, Non-maintained, DALI addressable c/w Open Area Optic

Part No.	Lm	W	Halo	Weight	CCT
TR2/2	217	2	109	0.3kg	6500K

Options

For Open Area Optic suffix
For Corridor Area Optic suffix
For Narrow Optic suffix

/OA
/CO
/NA