

ZMP Surface Mounted Bulkhead



- IP20 suitable for internal environments
- Impact rating of IK06
- Efficacy of up to 142lm/W
- Nominal life-time of 72,000h (L80/B10)
- Colour stability with 3 step MacAdam
- Emergency BLF = 420lm
- High colour rendering index CRI > 80
- TP(a) fire rated




To Specify:

Select Part Number with additional options if required

e.g. **ZMP/3092/4/CAS/ST**

ZMP, 3092 lumens, 22W, 4000K, Casambi enabled, c/w self-test emergency

Part No.	lm	W	lm/W	CCT
ZMP/2157/3	2157	16	135	3000K
ZMP/2271/4	2271	16	142	4000K
ZMP/2993/3	2993	22	133	3000K
ZMP/3092/4	3092	22	141	4000K
ZMP/3557/3	3557	28	127	3000K
ZMP/3759/4	3759	28	134	4000K

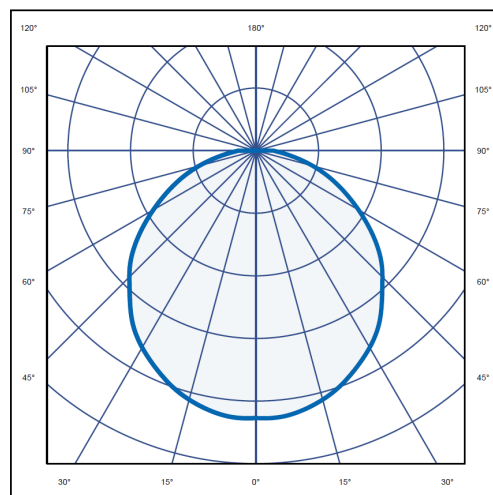

Options

For integral emergency suffix
 For DALI dimmable suffix
 For self-test emergency suffix
 For DALI addressable emergency suffix
 For Casambi enabled suffix
 For wireless dimmable system suffix
 For wireless addressable emergency suffix

/EMR
/DIM
/ST
/EMP
/CAS
/WD
/WAE

Sensor Options

On-off, no daylight control suffix
 On-off, with daylight control suffix
 Corridor function, no daylight control suffix
 Corridor function, with daylight control suffix
 Dimm to off, no daylight control suffix
 Dimm to off, with daylight control suffix

/F1
/F2
/F3
/F4
/F5
/F6