


Lola Outdoor Surface



- IP65 suitable for external/wet environments
- Impact rating of IK10
- Efficacy of up to 132lm/W
- Nominal life-time of 81,000h (L80/B10)
- Colour stability with 3 step MacAdam
- High colour rendering index CRI > 80
- Emergency BLF = 377 lumens

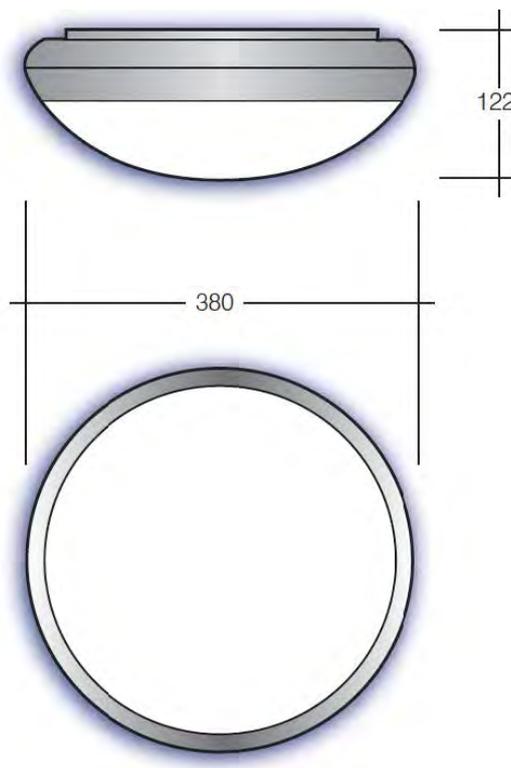

To Specify:

Select Part Number with additional options if required

e.g. **LOL/2620/4/CAS**

= Lola bulkhead, 21W, 2616lm, 4000K, white bezel, Casambi enabled

Part No.	W	lm	lm/W	CCT
LOL/1750/3	14	1751	125	3000K
LOL/1850/4	14	1845	132	4000K
LOL/2480/3	21	2481	120	3000K
LOL/2620/4	21	2616	127	4000K
LOL/2230/3	18	2231	123	3000K
LOL/2330/4	18	2326	128	4000K
LOL/2940/3	25	2945	118	3000K
LOL/3080/4	25	3080	123	4000K

Options

For Emergency suffix

/EMR

For DALI dimmable

/DIM

For self-test suffix

/ST

For DALI 3hr emergency suffix

/EMP

For Casambi enabled suffix

/CAS

For switch dimmable suffix

/SDIM

For wireless DALI dimmable suffix

/WD

For wireless DALI addressable emergency suffix

/WAE

For brass bezel suffix

/BT

For chrome bezel suffix

/CH

For satin silver bezel suffix

/SS

Sensor Options

On-Off, no daylight control suffix

/F1

On-off, with daylight control suffix

/F2

Corridor function, no daylight control suffix

/F3

Corridor function, with daylight control suffix

/F4

Dimm to off, no daylight control suffix

/F5

Dimm to off, with daylight control suffix

/F6