

# Cayden Round



- IP54 suitable for internal environments
- Impact rating of IK04
- Efficacy of up to 118lm/W
- Nominal life-time of 100,000 h (L80/B10)
- Colour stability with 3 step MacAdam
- Available in diameters: 220mm, 300mm, 360mm, 400mm, 500mm, 650mm, 900mm

## To Specify:

Select Part Number with additional options if required  
e.g. **CAY/R/4/2740/4/DIM**


= Cayden Round, Ø400mm, 2740lm, 24W, 4000K, DALI Dimmable

Part No.	ØD1	W	lm	lm/W	CCT
<b>CAY/R/22/740/3</b>	220	7	740	106	3000
<b>CAY/R/22/770/4</b>	220	7	770	110	4000
<b>CAY/R/3/1440/3</b>	300	13	1440	111	3000
<b>CAY/R/3/1500/4</b>	300	13	1500	115	4000
<b>CAY/R/36/1810/3</b>	360	17	1810	106	3000
<b>CAY/R/36/1890/4</b>	360	17	1890	111	4000
<b>CAY/R/4/2630/3</b>	400	24	2630	110	3000
<b>CAY/R/4/2740/4</b>	400	24	2740	114	4000
<b>CAY/R/4/3540/3</b>	400	34	3540	104	3000
<b>CAY/R/4/3690/4</b>	400	34	3690	109	4000
<b>CAY/R/5/3520/3</b>	500	32	3520	110	3000
<b>CAY/R/5/3670/4</b>	500	32	3670	115	4000
<b>CAY/R/65/7150/3</b>	650	65	7150	110	3000
<b>CAY/R/65/7470/4</b>	650	65	7470	115	4000
<b>CAY/R/9/11050/3</b>	900	98	11050	113	3000
<b>CAY/R/9/11520/4</b>	900	98	11520	118	4000

## Options

For DALI Dimmable suffix  
For Casambi enabled suffix  
For wireless dimmable suffix  
For 3 hr emergency suffix  
For self-test suffix  
For DALI addressable emergency suffix  
For wireless addressable emergency suffix

**/DIM**  
**/CAS**  
**/WD**  
**/EMR**  
**/ST**  
**/EMP**  
**/WAE**

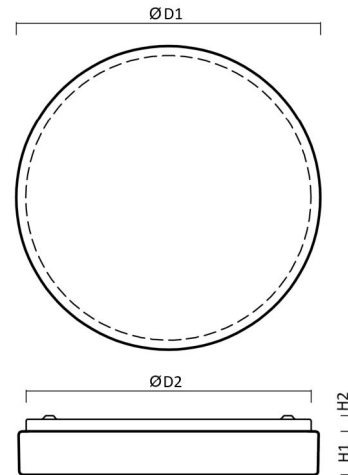

ØD1	220	300	360	400	500	650	900
ØD2	200	275	342	375	465	625	875
H1	46	55	55	55	60	60	65
H2	21	21	21	21	21	21	21

