

# Isla Recessed Modular




- Efficacies up to 142lm/W
- Emergency BLF = 380lm
- LG7 compliant
- 100,000 hour life expectancy (L80, B10)
- IP20 suitable for internal environments
- Impact Rating of IK08
- High colour rendering index CRI > 80
- Colour stability with 3 step MacAdam

## To Specify:

Select Part Number with additional options if required e.g. **ISLA/3600/84/DIM/EMP**

= Isla LED recessed luminaire, 3600lm, 25W, 4000K, DALI dimmable c/w DALI emergency

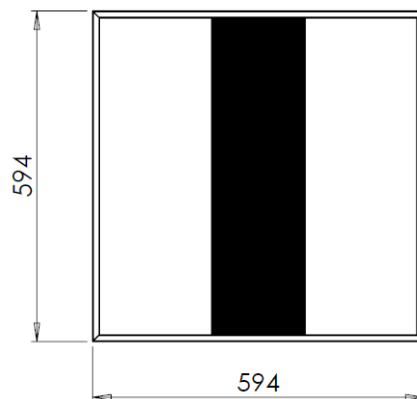

Part No.	W	Lm	lm/W	Weight (KG)	CCT
ISLA/2564/3	18	2564	142	3.2	3000K
ISLA/3092/4	21	3092	142	3.2	4000K
ISLA/3600/3	25	3600	140	3.2	3000K
ISLA/4031/4	29	4031	136	3.2	4000K
ISLA/4500/3	33	4500	134	3.2	3000K
ISLA/4984/4	37	4984	133	3.2	4000K

## Options

- For DALI dimmable suffix
- For Casambi enabled suffix
- For 3hr emergency suffix
- For 3hr self-test emergency suffix
- For 3hr DALI emergency suffix

**/DIM**  
**/CAS**  
**/EMR**  
**/ST**  
**/EMP**

