


LDIP Recessed Modular

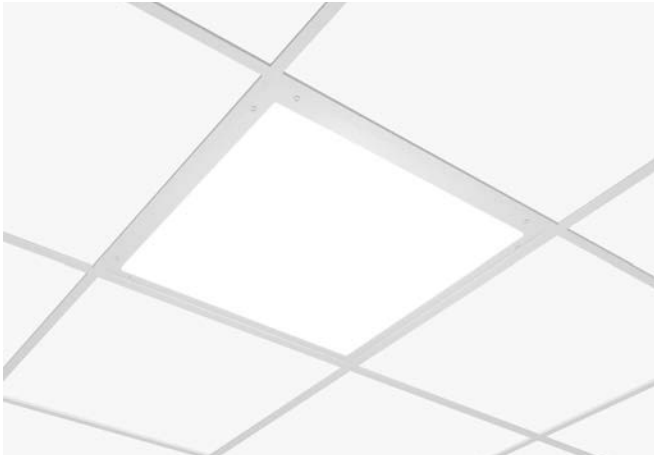


- Efficacies up to 127lm/W
- Emergency BLF = 282lm
- 100,000 hour life expectancy (L80, B10)
- IP65 suitable for internal environments
- Impact Rating of IK10
- High colour rendering index CRI > 80
- Colour stability with 3 step MacAdam
- Available in 3000K & 4000K

To Specify:

Select Part Number with additional options if required e.g. **LDIP/OP/4/4253/DIM/EMR**

= LDIP 600x600 modular, 4000K, 4253 lumens, DALI dimmable c/w 3hr self-contained emergency

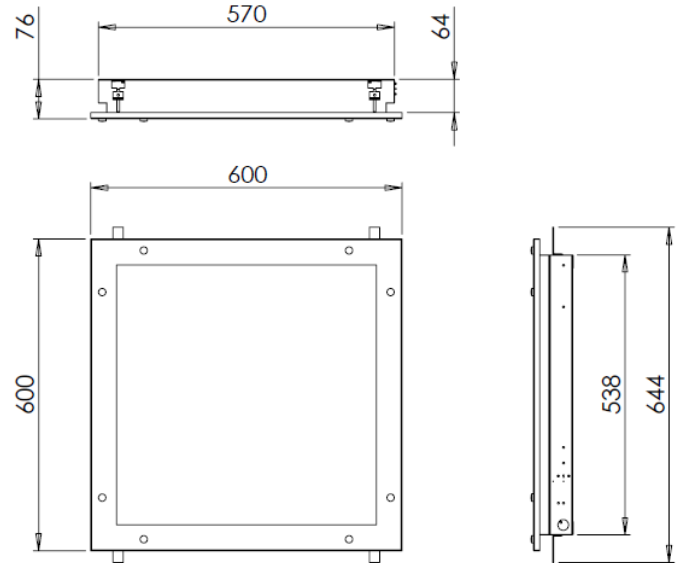

Part No.	W	Lm	lm/W	CCT
LDIP/OP/2684/4	21	2684	127	4000K
LDIP/OP/3224/4	25	3224	126	4000K
LDIP/OP/3746/4	30	3746	124	4000K
LDIP/OP/4253/4	34	4253	123	4000K
LDIP/OP/4744/4	39	4744	121	4000K
LDIP/MP/2484/4	21	2484	117	4000K
LDIP/MP/2984/4	25	2984	117	4000K
LDIP/MP/3468/4	30	3468	115	4000K
LDIP/MP/3937/4	34	3937	114	4000K
LDIP/MP/4391/4	39	4391	112	4000K

Options

For DALI dimmable suffix

For 3hr emergency suffix

For 3hr self-test emergency suffix

For 3hr DALI emergency suffix

/DIM

/EMR

/ST

/EMP

