


# Millie Suspended Opal System



- Body and gear tray - aluminium extrusion
- IP20 as standard, IP44 available on request
- Efficacy of up to 161lm/W
- Nominal life-time of 100,000 h (L80/B10)
- Colour stability with 3 step MacAdam
- Opal frosted diffuser - polycarbonate TP(a)
- Optics - PMMA TP(b)
- Modular optics - shade polycarbonate, optic - PMMA
- Colours: RAL 9003 White, RAL 9005 Black & RAL 9006 Grey
- Lengths available: 570mm, 850mm, 1130mm, 1410mm, 1690mm, 1970mm, 2250mm, 2530mm, 2810mm, 3090mm, 3370mm

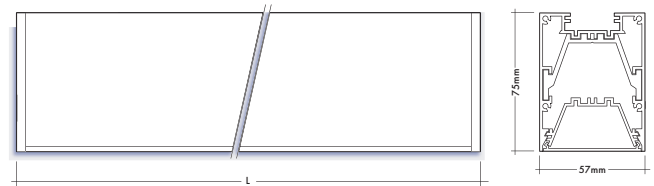

## To Specify:

Select Part Number with additional options if required

e.g. **MIL/S/16/OP/3925/4/BLK/DIM**

= Millie, Suspended, 1690mm, Opal, 3925lm, 28W, 4000K, Black RAL 9005 finish, DALI dimmable

Direct Only	Lm	W	Lm/W	BLF	Weight	L (mm)
MIL/S/11/OP/1307/4	1307	9	140	413	2.6kg	1130
MIL/S/11/OP/2616/4	2616	19	137	413	2.6kg	1130
MIL/S/11/OP/3836/4	3836	29	132	413	2.6kg	1130
MIL/S/16/OP/1961/4	1961	14	136	416	3.8kg	1690
MIL/S/16/OP/3925/4	3925	28	137	416	3.8kg	1690
MIL/S/16/OP/5753/4	5753	43	132	416	3.8kg	1690
MIL/S/22/OP/2614/4	2614	18	140	417	5.2kg	2250
MIL/S/22/OP/5232/4	5232	38	137	417	5.2kg	2250
MIL/S/22/OP/7671/4	7671	58	132	417	5.2kg	2250

## Options


- For 4000K suffix /4
- For 3000K suffix /3
- For white finish suffix /WHI
- For black finish suffix /BLK
- For grey finish suffix /GRY
- For Casambi enabled suffix /CAS
- For DALI Dimmable suffix /DIM
- For wireless DALI suffix /WD
- For 3hr integral emergency suffix /EMR
- For 3hr self-test emergency suffix /ST
- For DALI addressable emergency suffix /EMP
- For wireless DALI addressable emergency /WAE
- For 90° low glare optic /90
- For Asymmetric wall wash optic /AS
- For Double asymmetric optic /DA
- Integral Sensor /SEN

Direct/In-Direct	Lm	W	Lm/W	Weight	L (mm)
MIL/DI/11/OP/1750/4	1746	14	126	2.9kg	1130
MIL/DI/11/OP/2570/4	2565	20	128	2.9kg	1130
MIL/DI/11/OP/3390/4	3389	27	128	2.9kg	1130
MIL/DI/16/OP/2780/4	2784	21	135	4.2kg	1690
MIL/DI/16/OP/4120/4	4117	30	136	4.2kg	1690
MIL/DI/16/OP/5450/4	5450	40	135	4.2kg	1690
MIL/DI/22/OP/3500/4	3498	28	126	5.8kg	2250
MIL/DI/22/OP/5130/4	5134	40	128	5.8kg	2250
MIL/DI/22/OP/6780/4	6782	53	128	5.8kg	2250


## Accessories

- Suspended / Surface end cap /MIL/ECS
- Wire suspension kit (2m) /MIL/WIRE
- Wall mounting bracket /MIL/WALL
- Coupler /MIL/CPLR


## Direct



## Direct/In-Direct



## Fitting Lengths (mm)

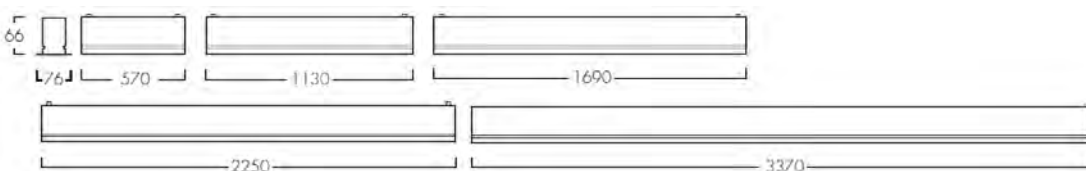

# Millie Suspended Microprismatic System




- Body and gear tray - aluminium extrusion
- IP20 as standard, IP44 available on request
- Efficacy of up to 161lm/W
- Nominal life-time of 100,000 h (L80/B10)
- Colour stability with 3 step MacAdam
- Opal frosted diffuser - polycarbonate TP(a)
- Optics - PMMA TP(b)
- Modular optics - shade polycarbonate, optic - PMMA
- Colours: RAL 9003 White, RAL 9005 Black & RAL 9006 Grey
- Lengths available: 570mm, 850mm, 1130mm, 1410mm, 1690mm, 1970mm, 2250mm, 2530mm, 2810mm, 3090mm, 3370mm

## To Specify:

Select Part Number with additional options if required  
e.g. **MIL/S/22/MP/2544/4/BLK/DIM**

= Millie, Suspended, 2250mm, Microprismatic, 2544lm, 18W, 4000K, Black RAL 9005 finish, DALI dimmable

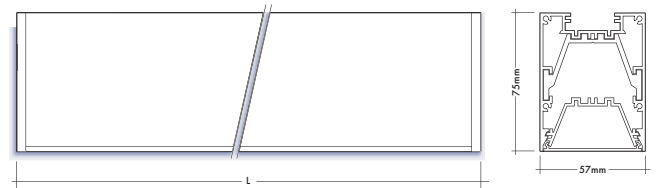

Direct Only	Lm	W	Lm/W	Weight	L (mm)
MIL/S/11/MP/1272/4	1272	9	136	2.6kg	1130
MIL/S/11/MP/2546/4	2546	19	133	2.6kg	1130
MIL/S/11/MP/3732/4	3732	29	128	2.6kg	1130
MIL/S/16/MP/1908/4	1908	14	132	3.8kg	1690
MIL/S/16/MP/3819/4	3819	28	133	3.8kg	1690
MIL/S/16/MP/5598/4	5598	43	128	3.8kg	1690
MIL/S/22/MP/2544/4	2544	18	136	5.2kg	2250
MIL/S/22/MP/5091/4	5091	38	133	5.2kg	2250
MIL/S/22/MP/7464/4	7464	58	128	5.2kg	2250

## Options


- For 4000K suffix /4
- For 3000K suffix /3
- For white finish suffix /WHI
- For black finish suffix /BLK
- For grey finish suffix /GRY
- For Casambi enabled suffix /CAS
- For DALI Dimmable suffix /DIM
- For wireless DALI suffix /WD
- For 3hr integral emergency suffix /EMR
- For 3hr self-test emergency suffix /ST
- For DALI addressable emergency suffix /EMP
- For wireless DALI addressable emergency /WAE
- For 90° low glare optic /90
- For Asymmetric wall wash optic /AS
- For Double asymmetric optic /DA
- Integral Sensor /SEN

Direct/In-Direct	Lm	W	Lm/W	Weight	L (mm)
MIL/DI/11/MP/1300/4	1296	11	115	2.9kg	1130
MIL/DI/11/MP/1710/4	1707	14	123	2.9kg	1130
MIL/DI/11/MP/2620/4	2616	20	130	2.9kg	1130
MIL/DI/16/MP/1900/4	1904	16	117	4.2kg	1690
MIL/DI/16/MP/2730/4	2730	21	133	4.2kg	1690
MIL/DI/16/MP/5210/4	5214	40	129	4.2kg	1690
MIL/DI/22/MP/2590/4	2929	23	115	5.8kg	2250
MIL/DI/22/MP/3410/4	3414	28	123	5.8kg	2250
MIL/DI/22/MP/5230/4	5232	40	130	5.8kg	2250


## Accessories

- Suspended / Surface end cap /MIL/ECS
- Wire suspension kit (2m) /MIL/WIRE
- Wall mounting bracket /MIL/WALL
- Coupler /MIL/CPLR

## Direct



## Direct/In-Direct



## Fitting Lengths (mm)

