


# Dominique 140 Pendant



- IP65 from below, IP20 from above
- Impact rating of IK05
- Efficacy of up to 127lm/W
- Nominal life-time of 100,000 h (L80/B10)
- Colour stability with 3 step MacAdam
- CRI 80 as standard, CRI 90 available on request

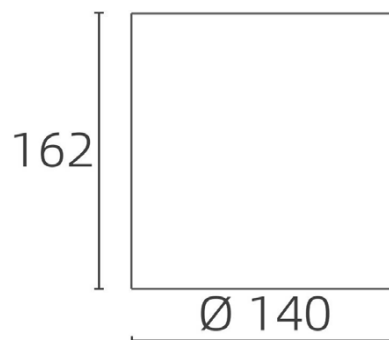

## To Specify:

Select Part Number with additional options if required

e.g. **DOM/140/1349/4/60D/DIM/EMR**

= Dominique 140, 11W, 1349 lumens, 4000K, 60D, DALI dimmable c/w 3hr self-contained emergency

Part No. (3000K)	Lm	W	lm/W
DOM/140/1281/20D/3	1281	11	120
DOM/140/2775/20D/3	2775	26	105
DOM/140/1271/40D/3	1271	11	119
DOM/140/2754/40D/3	2754	26	105
DOM/140/1289/60D/3	1289	11	121
DOM/140/2792/60D/3	2792	26	106

Part No. (4000K)	Lm	W	lm/W
DOM/140/1349/20D/4	1349	11	127
DOM/140/2921/20D/4	2921	26	111
DOM/140/1338/40D/4	1338	11	126
DOM/140/2899/40D/4	2899	26	110
DOM/140/1384/60D/4	1384	12	116
DOM/140/2884/60D/4	2884	26	109

## Options

- For black finish suffix
- For white finish suffix
- For DALI dimmable suffix
- For 3hr emergency suffix
- For DALI addressable emergency suffix
- For self test suffix

/BLK  
/WHI  
/DIM  
/EMR  
/EMP  
/ST


## Accessories

- For 2m suspension kit
- For 5m suspension kit


DOM/WIRE  
DOM/WIRE/5

# Dominique Pendant

20° Optic:

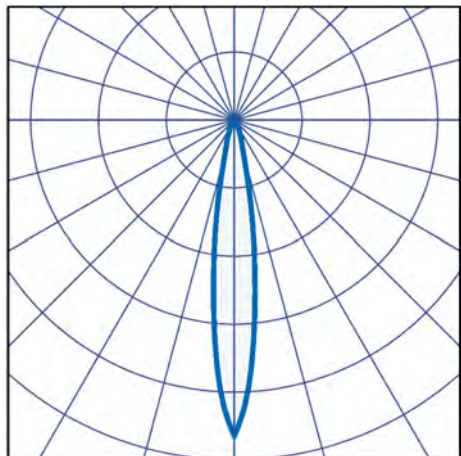

40° Optic:

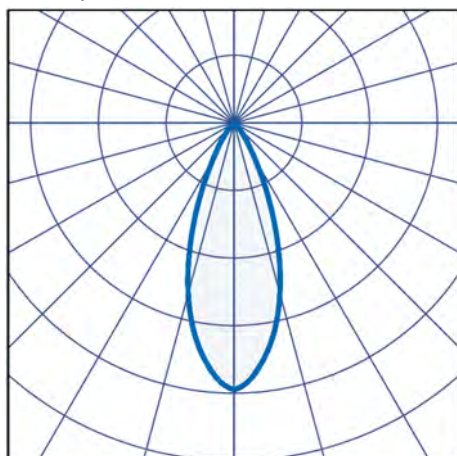

60° Optic:

