


Dominique 205 Surface



- IP65 front, IP20 rear suitable for internal environments.
- Impact rating of IK05
- Efficacy of up to 140lm/W
- Nominal life-time of 100,000 h (L80/B10)
- Colour stability with 3 step MacAdam
- CRI 80 as standard, CRI 90 available on request

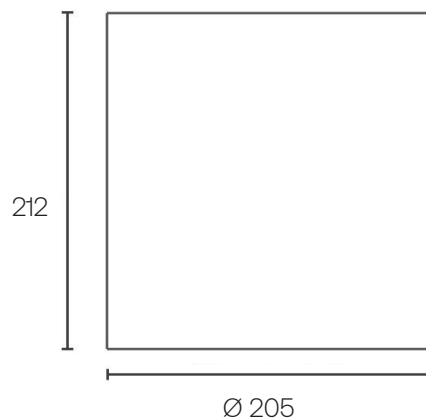

To Specify:

Select Part Number with additional options if required

e.g. **DOM/205/4780/4/60D/DIM/EMR**

= Dominique 205mm Ø, 34W, 4780 lumens, 4000K, 60D, DALI dimmable c/w 3hr self-contained emergency

Part No. (4000K)	Lm	W	lm/W
DOM/205/1604/60D/4	1604	12	136
DOM/205/3681/60D/4	3681	27	140
DOM/205/4780/60D/4	4780	34	139
DOM/205/5559/60D/4	5559	48	136
DOM/205/6471/60D/4	6471	51	126

Options

- For black finish suffix
- For white finish suffix
- For DALI dimmable suffix
- For wireless dimmable suffix
- For 3hr emergency suffix
- For DALI addressable emergency suffix
- For self test suffix
- For wireless addressable emergency suffix

/BLK
/WHI
/DIM
/CAS
/EMR
/EMP
/ST
/WAE

