


Louis Recessed Modular

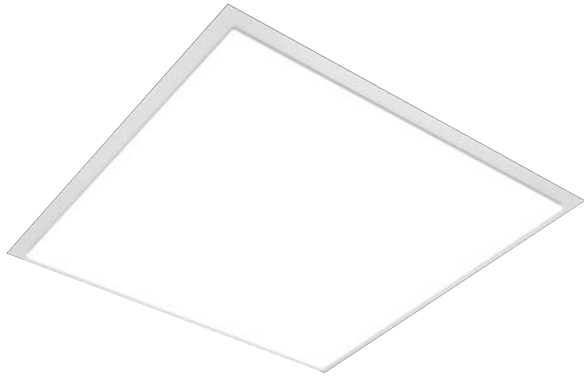

- Efficacies up to 134lm/W
- Emergency BLF = 330lm
- 50,000 hour life expectancy (L80, B10)
- IP40 front, IP20 back as standard, IP65 also available
- Impact Rating of IK04
- High colour rendering index CRI > 80
- Colour stability with 3 step MacAdam
- LG7 compliant
- UGR > 19
- 1200 x 300 & 1200 x 600 also available
- TP(a) rated

To Specify:

Select Part Number with additional options if required e.g. **LOU/66/3300/4/TPA/DIM/ST**
 = Louis 600mm x 600mm Premium Panel, 25w, 3325 lumens, 4000K, DALI dimmable c/w self-test Emergency

Part No.	W	Lm	lm/W	CCT
LOU/66/3000/4/TPA	24	3052	127	4000K
LOU/66/3300/4/TPA	25	3325	133	4000K
LOU/66/3600/4/TPA	28	3606	128	4000K
LOU/66/3800/4/TPA	30	3868	128	4000K
LOU/66/4000/4/TPA	33	4089	123	4000K
LOU/66/4400/4/TPA	35	4395	130	4000K
LOU/66/4500/4/TPA	37	4510	121	4000K
LOU/66/4700/4/TPA	39	4724	118	4000K

Options

For surface option suffix (recessed is standard)
 For DALI dimmable suffix
 For 3hr emergency suffix
 For 3hr self-test emergency suffix
 For 3hr DALI emergency suffix
 For Casambi enabled suffix
 For wireless addressable emergency suffix
 For Casambi Sensor

/SF
 /DIM
 /EMR
 /ST
 /EMP
 /CAS
 /WAE
 /SEN/CAS

