


Ava Direct/In-Direct Wall Lighting

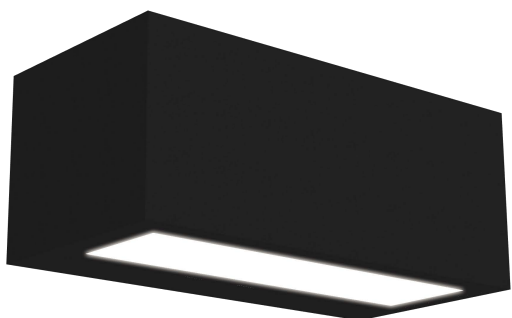

- Efficacies up to 84lm/W
- Impact rating of IK08
- IP65 suitable for external environments
- Nominal life-time of 93,000h (L80/B10)
- Colour stability with 3 step MacAdam
- CRI 80 as standard, CRI 90 available on request
- Emergency BLF = 210lm

To Specify:

Select Part Number with additional options if required

e.g. **AVA/1501/4**

= Ava wall lighting, 18W, 1501lm, 4000K



Part No.	W	lm	lm/W	CCT
AVA/938/3	12	938	78	3000K
AVA/1008/4	12	1008	84	4000K
AVA/1397/3	18	1397	77	3000K
AVA/1501/4	18	1501	83	4000K
AVA/1754/3	24	1754	72	3000K
AVA/1884/4	24	1884	77	4000K

Options

For Emergency suffix

For DALI dimmable

For casambi enabled suffix

For wireless dimmable system suffix

For self-test suffix

For addressable emergency suffix

For wireless addressable emergency suffix

/EMR

/DIM

/CAS

/WD

/ST

/EMP

/WAE

