


Boxster Direct/In-Direct Wall Lighting



- $\varnothing 120 \times 145 \times 105$ mm Im/W ÷ 158
- Impact rating of IK09
- IP65 suitable for external environments
- Nominal life-time of 50,000h (L80/B10)
- Colour stability with 3 step MacAdam
- Available in Black, White & Grey
- CRI 80 as standard, CRI 90 available on request
- Emergency BLF = 395lm

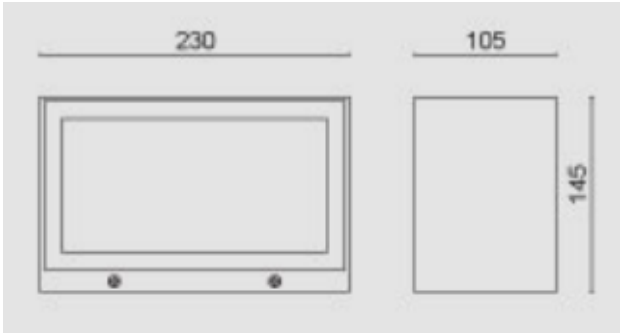


To Specify:

Select Part Number with additional options if required
e.g. **BOX/5400/4**

= Boxster, 34W, 5400lm, 4000K

Part No.	W	lm	lm/W	CCT
BOX/1780/4	12	1780	142	4000K
BOX/2240/4	17	2240	131	4000K
BOX/3560/4	25	3560	142	4000K
BOX/5400/4	34	5400	158	4000K

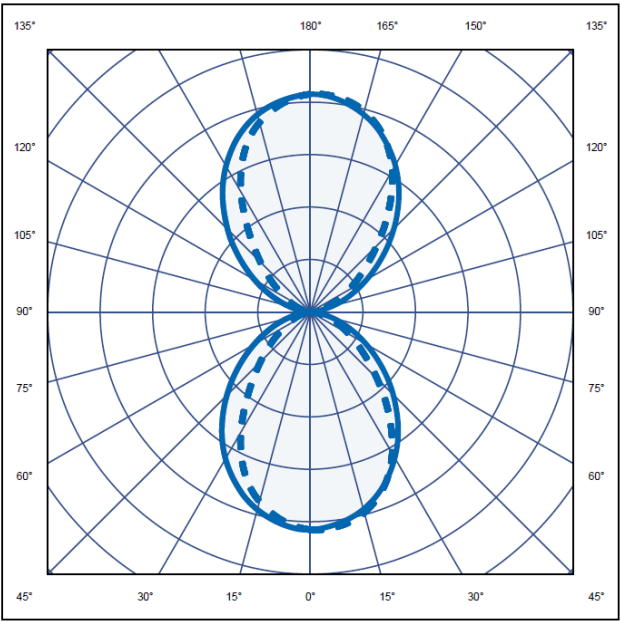

Options

- For Emergency suffix **/EMR**
- For DALI dimmable **/DIM**
- For casambi enabled suffix **/CAS**
- For wireless dimmable system suffix **/WD**
- For self-test suffix **/ST**
- For addressable emergency suffix **/EMP**
- For wireless addressable emergency suffix **/WAE**

