

Brooklyn Recessed Modular




- Efficacies up to 126lm/W
- Colour stability with 3 step MacAdam
- Opal frosted diffuser, 3mm polycarbonate TP(a)
- Microprism diffuser, 3mm polycarbonate (TP)a
- 60,000 hour life expectancy (L80, B10)
- IP20 suitable for internal environments
- Impact Rating of IK08
- MP Emergency BLF = 350lm
- Opal Emergency BLF = 325lm

To Specify:


Select Part Number with additional options if required e.g. **BRO/66/OP/3292/4/DIM/ST**

= Brooklyn, 25w, 3292lumens, 4000K, DALI dimmable c/w self-test emergency


Part No.	W	lm	lm/W	CCT
BRO/66/OP/1848/4	14	1848	127	4000K
BRO/66/OP/3292/4	25	3292	129	4000K
BRO/66/OP/4322/4	34	4322	125	4000K
BRO/66/OP/5500/4	46	5500	119	4000K
BRO/66/MP/1717/4	14	1717	118	4000K
BRO/66/MP/3076/4	25	3076	120	4000K
BRO/66/MP/4027/4	34	4027	116	4000K
BRO/66/MP/5119/4	46	5119	110	4000K

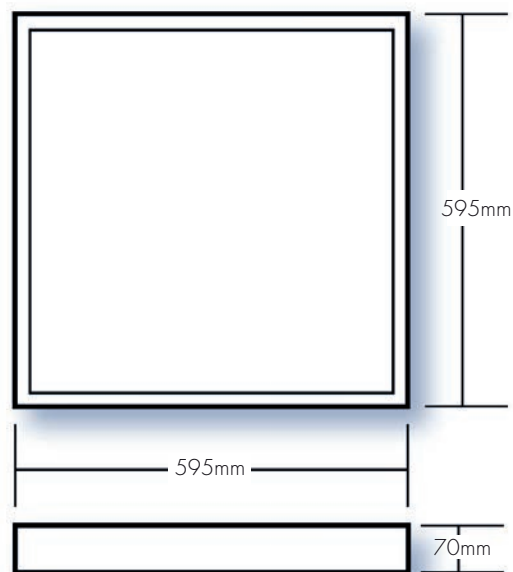

Opal

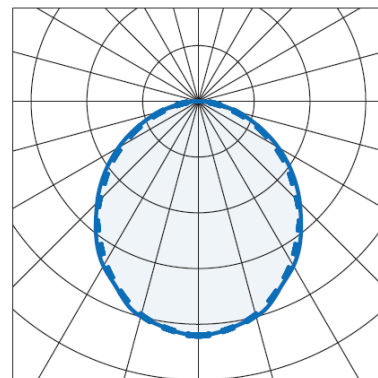

Microprismatic

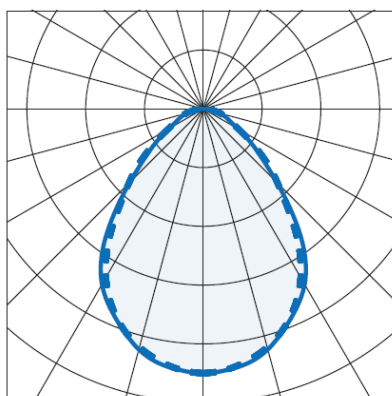

Options

For DALI dimmable suffix
For Casambi enabled suffix
For Wireless DALI dimming
For 3hr emergency suffix
For 3hr self-test emergency suffix
For 3hr DALI emergency suffix
For wireless addressable emergency

/DIM
/CAS
/WD
/EMR
/ST
/EMP
/WAE