

Cayden Round




- IP54 suitable for internal environments
- Impact rating of IK04
- Efficacy of up to 118lm/W
- Nominal life-time of 100,000 h (L80/B10)
- Colour stability with 3 step MacAdam
- Available in diameters: 220mm, 300mm, 360mm, 400mm, 500mm, 650mm, 900mm
- Emergency BLF = 295lm

To Specify:


Select Part Number with additional options if required
e.g. **CAY/R/4/2740/4/DIM**

= Cayden Round, Ø400mm, 2740lm, 24W, 4000K, DALI Dimmable

Part No.	ØD1	W	lm	lm/W	CCT
CAY/R/22/740/3	220	7	740	106	3000
CAY/R/22/770/4	220	7	770	110	4000
CAY/R/3/1440/3	300	13	1440	111	3000
CAY/R/3/1500/4	300	13	1500	115	4000
CAY/R/36/1810/3	360	17	1810	106	3000
CAY/R/36/1890/4	360	17	1890	111	4000
CAY/R/4/2630/3	400	24	2630	110	3000
CAY/R/4/2740/4	400	24	2740	114	4000
CAY/R/4/3540/3	400	34	3540	104	3000
CAY/R/4/3690/4	400	34	3690	109	4000
CAY/R/5/3520/3	500	32	3520	110	3000
CAY/R/5/3670/4	500	32	3670	115	4000
CAY/R/65/7150/3	650	65	7150	110	3000
CAY/R/65/7470/4	650	65	7470	115	4000
CAY/R/9/11050/3	900	98	11050	113	3000
CAY/R/9/11520/4	900	98	11520	118	4000

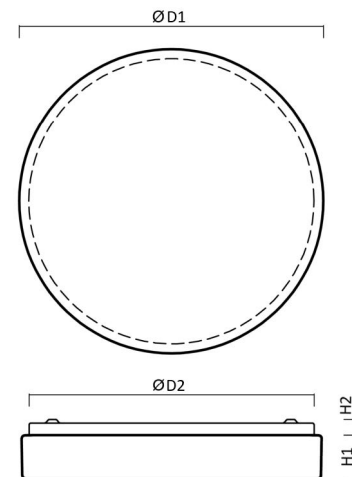

ØD1	220	300	360	400	500	650	900
ØD2	200	275	342	375	465	625	875
H1	46	55	55	55	60	60	65
H2	21	21	21	21	21	21	21

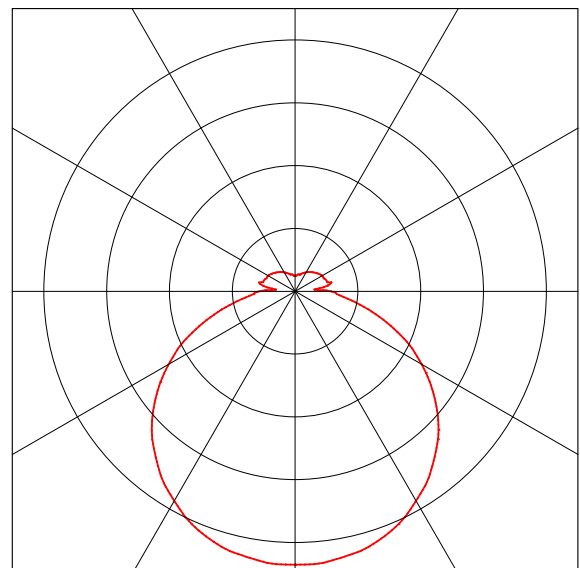

Options

For DALI Dimmable suffix
For Casambi enabled suffix
For wireless dimmable suffix
For 3 hr emergency suffix
For self-test suffix
For DALI addressable emergency suffix
For wireless addressable emergency suffix

/DIM
/CAS
/WD
/EMR
/ST
/EMP
/WAE