

Cayden Square



- IP54 suitable for internal environments
- Impact rating of IK04
- Efficacy of up to 116lm/W
- Nominal life-time of 100,000 h (L80/B10)
- Colour stability with 3 step MacAdam
- Available in lengths: 220mm, 300mm, 360mm, 400mm, 550mm
- Emergency BLF = 290lm


To Specify:

Select Part Number with additional options if required

e.g. **CAY/S/2620/4/DIM**

= Cayden Square, 2620lm, 24W, 4000K, DALI Dimmable

Part No.	L1	W	lm	lm/W	CCT
CAY/S/22/1110/3	220	11	1110	101	3000
CAY/S/22/1150/4	220	11	1150	105	4000
CAY/S/3/1780/3	300	16	1780	111	3000
CAY/S/3/1850/4	300	16	1850	116	4000
CAY/S/36/1790/3	360	17	1790	105	3000
CAY/S/36/1880/4	360	17	1880	111	4000
CAY/S/4/2510/3	400	24	2510	110	3000
CAY/S/4/2620/4	400	24	2620	114	4000
CAY/S/4/3380/3	400	34	3380	104	3000
CAY/S/4/3530/4	400	34	3530	109	4000
CAY/S/55/4360/3	550	40	4360	109	3000
CAY/S/55/4550/4	550	40	4550	114	4000

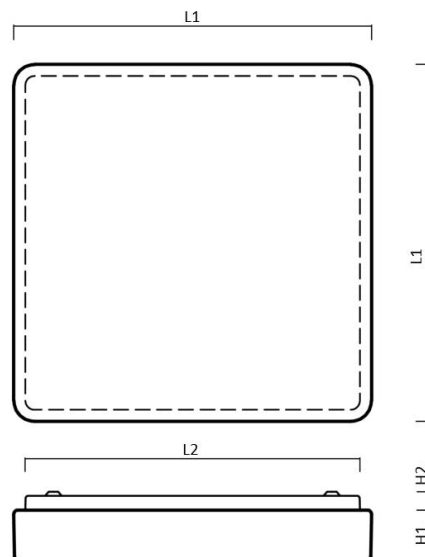

L1	220	300	360	400	550
L2	200	270	337	375	525
H1	40	55	55	55	60
H2	21	21	21	21	21

Options

For DALI Dimmable suffix
For Casambi enabled suffix
For wireless dimmable suffix
For 3 hr emergency suffix
For self-test suffix

For DALI addressable emergency suffix
For wireless addressable emergency suffix

/DIM
/CAS
/WD
/EMR
/ST
/EMP
/WAE

