


Corey Linear Surface – Anti Ligature




- IP54 suitable for internal environments
- Impact rating of IK10
- Efficacy of up to 164lm/W
- Nominal life-time of 100,000h (L80/B10)
- Colour stability with 3 step MacAdam
- High colour rendering index CRI > 80
- Emergency BLF = 410lm

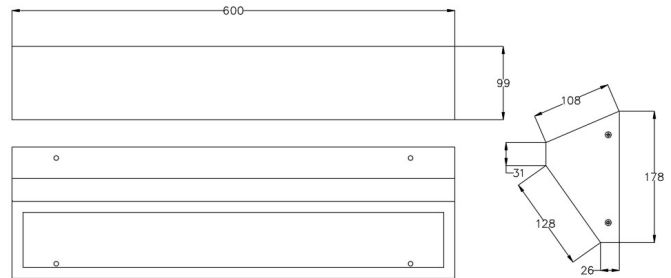

To Specify:

Select Part Number with additional options if required e.g. **CORE/5498/4/WHI/ST**
 = Corey, 38W 5498lm, 4000K, 3hr Self Test Emergency

Part No.	W	lm	lm/W	L(mm)
CORE/4246/4	29	4246	146	600
CORE/4889/4	34	4889	143	600
CORE/5498/4	38	5498	141	600
CORE/6368/4	42	6368	139	900
CORE/7343/4	50	7343	147	900
CORE/8247/4	57	8247	144	900

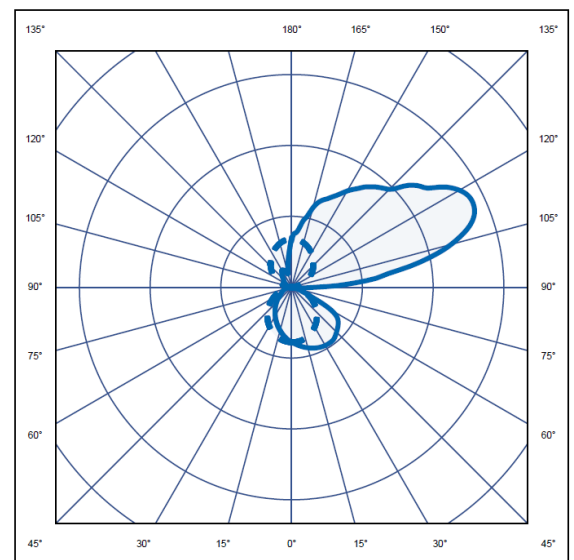

Options

For 3 hour Maintained Emergency option suffix
 For DALI Dimmable suffix
 For 3hr Self-test emergency suffix
 For DALI 3hr emergency suffix

/EMR
/DIM
/ST
/EMP