


Dominique 205 Surface



- IP65 front, IP20 rear suitable for internal environments.
- Impact rating of IK05
- Efficacy of up to 140lm/W
- Nominal life-time of 100,000 h (L80/B10)
- Colour stability with 3 step MacAdam
- CRI 80 as standard, CRI 90 available on request
- Emergency BLF = 350lm

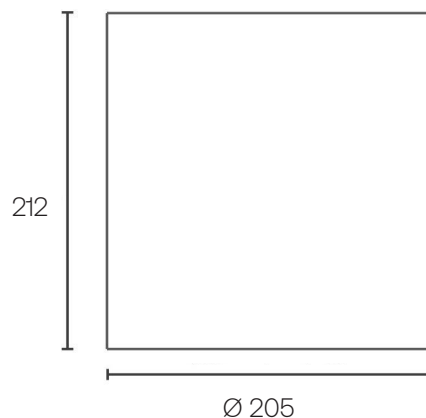

To Specify:

Select Part Number with additional options if required

e.g. **DOM/205/4780/4/60D/DIM/EMR**

= Dominique 205mm Ø, 34W, 4780 lumens, 4000K, 60D, DALI dimmable c/w 3hr self-contained emergency

Part No. (4000K)	Lm	W	lm/W
DOM/205/1604/60D/4	1604	12	136
DOM/205/3681/60D/4	3681	27	140
DOM/205/4780/60D/4	4780	34	139
DOM/205/5559/60D/4	5559	48	136
DOM/205/6471/60D/4	6471	51	126

Options

For black finish suffix
 For white finish suffix
 For DALI dimmable suffix
 For wireless dimmable suffix
 For 3hr emergency suffix
 For DALI addressable emergency suffix
 For self test suffix
 For wireless addressable emergency suffix

/BLK
/WHI
/DIM
/CAS
/EMR
/EMP
/ST
/WAE

