


Dominique 95 Pendant



- IP20 suitable for internal environments
- Impact rating of IK05
- Efficacy of up to 110lm/W
- Nominal life-time of 90,000 h (L80/B10)
- Colour stability with 3 step MacAdam
- CRI 80 as standard, CRI 90 available on request
- Dimmable and Emergency control gear remote
- Supplied with remote control for all options other than fixed output
- Emergency BLF = 275lm



To Specify:

Select Part Number with additional options if required e.g.

DOM/95/1263/4/60D/DIM

= Dominique 95 downlighter, 11W, 1263lm, 4000K, 60D, DALI dimmable

Part No. (3000K)	Lm	W	lm/W
DOM/95/1160/20D/3	1160	11	101
DOM/95/1758/20D/3	1758	20	88
DOM/95/1183/40D/3	1183	11	103
DOM/95/1756/40D/3	1756	20	88
DOM/S/1200/60D/3	1200	11	105
DOM/S/1780/60D/3	1780	20	89

Part No. (4000K)	Lm	W	lm/W
DOM/95/1221/20D/4	1221	11	107
DOM/95/1851/20D/4	1851	20	92
DOM/95/1246/40D/4	1246	11	109
DOM/95/1848/40D/4	1848	20	92
DOM/95/1263/60D/4	1263	11	110
DOM/95/1874/60D/4	1874	20	94

Options

For black finish suffix
For white finish suffix
For DALI dimmable suffix
For 3hr emergency suffix
For DALI addressable emergency suffix
For self test suffix

/BLK
/WHI
/DIM
/EMR
/EMP
/ST


Accessories

For ceiling rose kit


DOM/95/ROSE/KIT

Dominique 95 Surface

20° Optic:

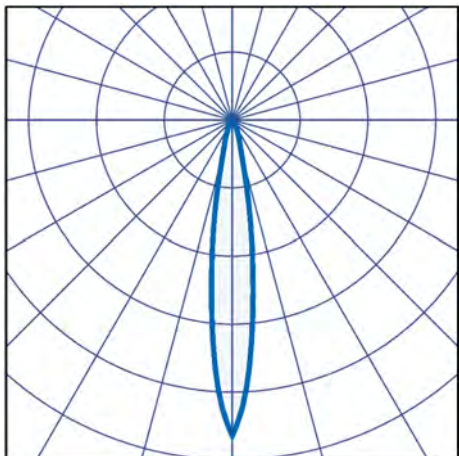

40° Optic:

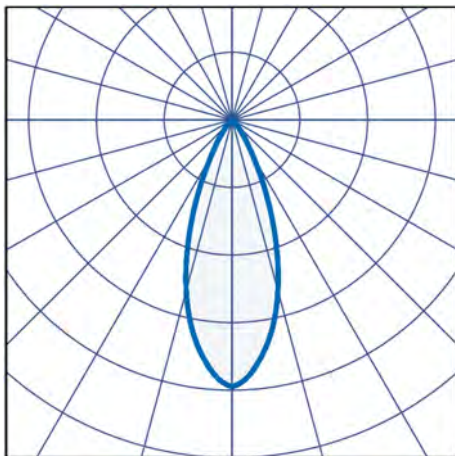

60° Optic:

