


Emily Recessed Modular

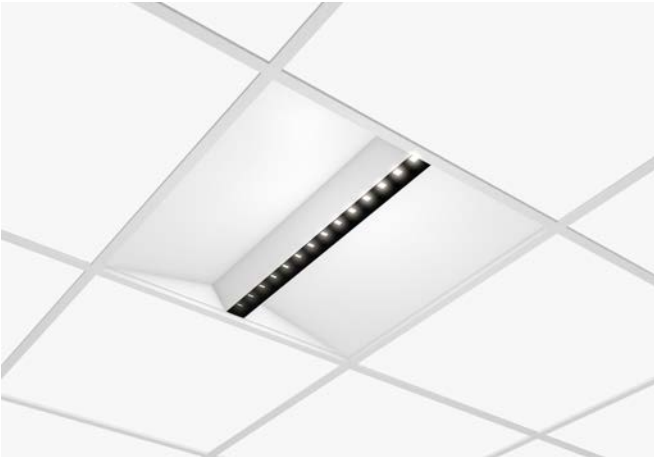

- Efficacies up to 151lm/W
- Colour stability with 3 step MacAdam
- Material: Steel with PC white and black optics
- 90,000 hour life expectancy (L80, B10)
- IP20 suitable for internal environments
- Impact Rating of IK04
- CRI > 80 as standard, CRI > 90 available
- Tunable white option
- Optical efficiency up to 92%
- Light emission angle 90° for high uniformity
- Optics with constant light colour over beam angle (CLC)
- UGR optimized optics with grid
- Emergency BLF = 377lm

To Specify:

Select Part Number with additional options if required e.g.

EMI/W/3667/4/CAS

= Emily, White Grid Louver, 26w, 3667lumens, 4000K, Casambi enabled

Part No.	W	lm	lm/W	CCT
EMI/B/1441/4	11	1441	130	4000K
EMI/W/1681/4	11	1681	151	4000K
EMI/B/2048/4	16	2048	127	4000K
EMI/W/2385/4	16	2385	146	4000K
EMI/B/2549/4	21	2549	124	4000K
EMI/W/2954/4	21	2954	143	4000K
EMI/B/3159/4	26	3159	122	4000K
EMI/W/3667/4	26	3667	140	4000K
EMI/B/3608/4	31	3608	118	4000K
EMI/W/4166/4	31	4166	135	4000K

Options

For DALI dimmable suffix
 For linear white grid louvre
 For linear black grid louvre
 For Casambi enabled suffix
 For wireless dimmable system suffix
 For 3hr emergency suffix
 For 3hr self-test emergency suffix
 For 3hr DALI emergency suffix
 For wireless addressable emergency suffix

/DIM
 /EMI/W
 /EMI/B
 /CAS
 /WD
 /EMR
 /ST
 /EMP
 /WAE

