


# Garth Anti-Ligature Bulkhead



- IP65 rated against dust and water ingress
- Impact rating of IK10
- Efficacy of up to 123lm/W
- Nominal life-time of 100,000h (L80/B10)
- Colour stability with 3 step MacAdam
- High colour rendering index CRI > 80
- 5mm TP(a) diffuser
- 1.5mm steel powder coated
- Emergency BLF = 308lm

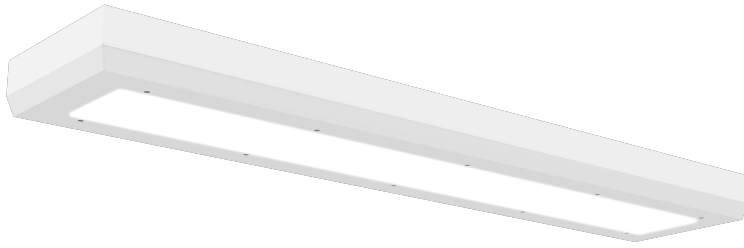

## To Specify:

Select Part Number with additional options if required

e.g. **GAR/15/4350/4/DIM**

= Garth, 1500mm, 4350 Lumens, 4000K, DALI dimmable

| Part No.              | W  | lm    | lm/W | L(mm) |
|-----------------------|----|-------|------|-------|
| <b>GAR/12/3480/4</b>  | 21 | 3480  | 165  | 4000K |
| <b>GAR/12/5800/4</b>  | 35 | 5800  | 165  | 4000K |
| <b>GAR/12/8080/4</b>  | 51 | 8080  | 158  | 4000K |
| <b>GAR/15/4350/4</b>  | 25 | 4350  | 174  | 4000K |
| <b>GAR/15/7250/4</b>  | 44 | 7250  | 164  | 4000K |
| <b>GAR/15/10100/4</b> | 63 | 10100 | 160  | 4000K |

## Options

For 3 hour Maintained Emergency option suffix

For DALI Dimmable suffix

For 3hr Self-test emergency suffix

For DALI 3hr emergency suffix

For White suffix

For Black suffix

For Microprismatic

For Opal

For Surface/Suspended suffix

For Recessed

/EMR

/DIM

/ST

/EMP

/W

/B

/MP

/OP

/S

/R

