

Grace Spotlight



- IP20 suitable for internal environments
- Impact rating of IK04
- Efficacy of up to 128lm/W
- Nominal life-time of 100,000 h (L80/B10)
- Colour stability with 3 step MacAdam
- CRI 80 as standard, CRI 90 available on request
- Emergency BLF = 320lm


To Specify:

Select Part Number with additional options if required

e.g. **GRA/2200/4/36D/BLK/CAS**

= Grace trackspot, 19W, 2273lm, 4000K, 36 reflector, black finish, Casambi enabled

Part No.	W	lm	lm/W	CCT
GRA/1380/3	12	1376	118	3000K
GRA/1600/4	13	1625	125	4000K
GRA/1980/3	17	1978	116	3000K
GRA/2200/4	19	2273	120	4000K
GRA/2680/3	24	2677	115	3000K
GRA/2600/4	24	2668	111	4000K
GRA/3170/3	30	3168	106	3000K
GRA/3440/4	30	3444	115	4000K

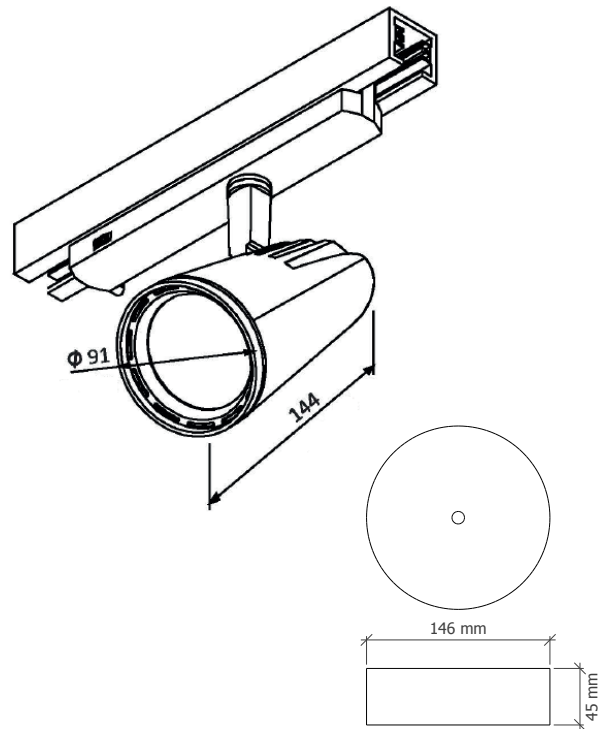

Options

For 18° reflector suffix	/18D
For 24° reflector suffix	/24D
For 36° reflector suffix	/36D
For 45° reflector suffix	/45D
For 60° reflector suffix	/60D
For 80° reflector suffix	/80D
For black finish suffix	/BLK
For white finish suffix	/WHI
For DALI dimmable suffix	/DIM
For Casambi enabled suffix	/CAS
For Surface mounted	/SURF