


Iris 600x600 Recessed Modular

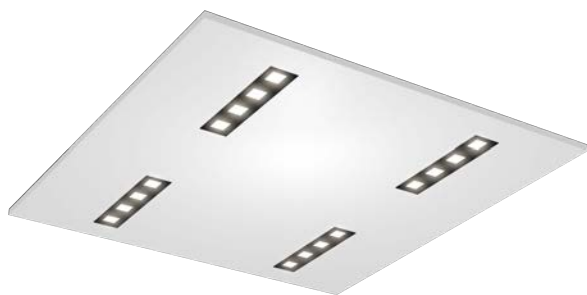

- Efficacies up to 152lm/W
- Material: PC white and black
- UGR optimised optics in grid
- 90,000 hour life expectancy (L80, B10)
- IP20 suitable for internal environments
- Impact Rating of IK08
- Tunable white option
- Colour stability with 3 step MacAdam
- Optical efficiency up to 92%
- Light emission angle 65° and 90° for high uniformity
- Optics with constant light colour over beam angle (CLC)
- Emergency BLF = 380lm


To Specify:

Select Part Number with additional options if required e.g. **IRIS/66/LW90/3200/4**

= Iris 600x600, linear 1x4 white 90° optics, 3304lm 23W, 4000K

CRI 80 as standard, CRI 90 available on request.

Part No.	W	Black Grid		White Grid		CCT
		65°	90°	65°	90°	
IRIS/66/L***/2100/3	15	1949	1850	2059	2091	3000K
IRIS/66/L***/2100/4	15	2058	1954	2174	2208	4000K
IRIS/66/L***/2700/3	19	2455	2334	2588	2638	3000K
IRIS/66/L***/2700/4	19	2592	2465	2733	2786	4000K
IRIS/66/L***/3200/3	23	2912	2786	3083	3129	3000K
IRIS/66/L***/3200/4	23	3075	2942	3256	3304	4000K
IRIS/66/L***/4100/3	30	3708	3532	3934	3987	3000K
IRIS/66/L***/4100/4	30	3916	3730	4154	4210	4000K
IRIS/66/L***/4600/3	34	4176	3997	4423	4469	3000K
IRIS/66/L***/4600/4	34	4410	4221	4671	4719	4000K

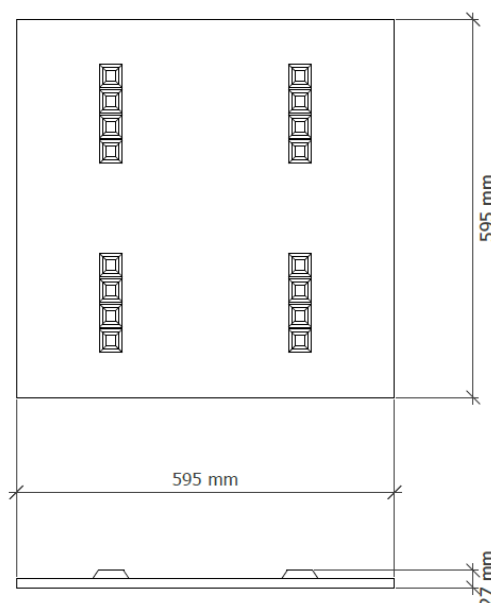


Options

For linear black grid & 65° optic
 For linear black grid & 90° optic
 For linear white grid & 65° optic
 For linear white grid & 90° optic
 For DALI dimmable suffix
 For Casambi enabled suffix
 For wireless dimmable system suffix
 For 3hr emergency suffix
 For 3hr self-test emergency suffix
 For 3hr DALI emergency suffix
 For wireless addressable emergency

IRIS/LB65
IRIS/LB90
IRIS/LW65
IRIS/LW90
/DIM
/CAS
/WD
/EMR
/ST
/EMP
/WAE

65° optic

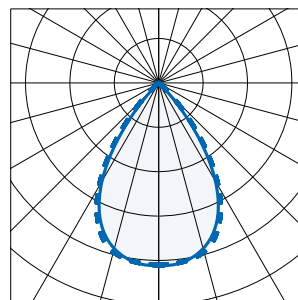

90° optic

