


Isaac Recessed Modular

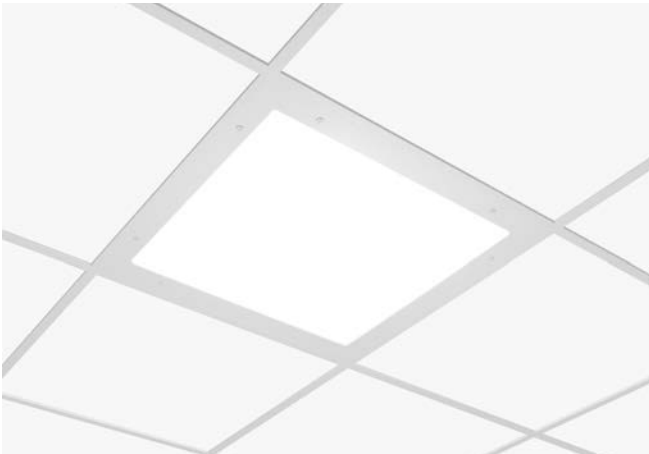

- Efficacies up to 139lm/W
- 100,000 hour life expectancy (L80, B10)
- IP65 suitable for internal environments
- High colour rendering index CRI > 80
- Colour stability with 3 step MacAdam
- Available in Opal & Microprismatic
- Emergency BLF = 348lm

To Specify:

Select Part Number with additional options if required e.g. **ISA/OP/4828/4/ST**

= Isaac 600x600, 4828 Lumens, 36W, Opal Diffuser c/w Self-test Emergency.

Part No.	W	Lm	lm/W	CCT
ISA/OP/2952	21	2952	139	4000K
ISA/OP/3924	28	3924	137	4000K
ISA/OP/4828	36	4828	134	4000K
ISA/OP/5753	43	5753	132	4000K
ISA/MP/2792	21	2792	131	4000K
ISA/MP/3712	28	3712	130	4000K
ISA/MP/4567	36	4567	127	4000K
ISA/MP/5442	43	5442	125	4000K

Options

For 3000k suffix
 For 4000k suffix
 For TP(a) microprismatic suffix
 For TP(a) opal suffix
 For rapid fix frame suffix
 For DALI dimmable suffix
 For 3hr emergency suffix
 For addressable emergency suffix
 For self-test suffix

/3
 /4
 /MP
 /OP
 /RF
 /DIM
 /EMR
 /EMP
 /ST

