


Keela Tubular Non-Corrosive

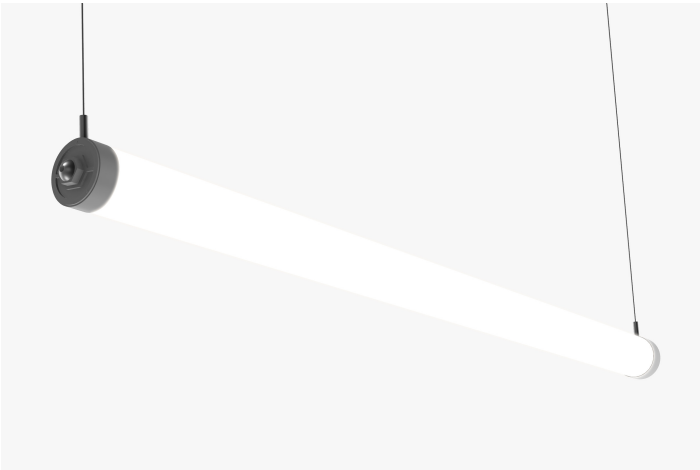

To Specify:

Select Part Number with additional options if required e.g. **KEE/5/12000/4**
 = Keela 1500mm, 11978 lumens, 86W, 4000K, DALI dimmable

Part No.	W	lm	lm/W	CCT
KEE/5/5000/4	34	5228	154	4000K
KEE/5/7000/4	46	7047	153	4000K
KEE/5/10000/4	71	10023	141	4000K
KEE/5/12000/4	86	11978	139	4000K

Options

For wireless addressable emergency suffix
 For wireless dimmable system suffix
 For emergency suffix
 For DALI dimmable suffix
 For casambi enabled suffix
 For self-test suffix
 For DALI addressable emergency suffix

/WAE
 /WD
 /EMR
 /DIM
 /CAS
 /ST
 /EMP

- Efficacies up to 154lm/W
- Impact rating of IK10
- IP69K suitable for harsh industrial environments
- Nominal life-time of 72,000h (L80/B10)
- Colour stability with 3 step MacAdam
- Through wired with cable entry both ends
- Fully adjustable fixing brackets
- Surface mounted or suspended
- CRI 80 as standard, CRI 90 available on request
- Emergency BLF = 385lm

