

Leila M Track Spotlight




To Specify:

Select Part Number with additional options if required
e.g. **LEI/M/2597/4/60D/BLK/CAS**

= Leila medium trackspot, 22W, 2597lm, 4000K, 60D reflector,
black finish, Casambi enabled

- IP20 suitable for internal environments
- Impact rating of IK02
- Efficacy of up to 133lm/W
- Nominal life-time of 100,000 h (L80/B10)
- Colour stability with 3 step MacAdam
- Surface mounting also available via ceiling rose
- CRI 80 as standard, CRI 90 available on request
- Emergency BLF = 333lm

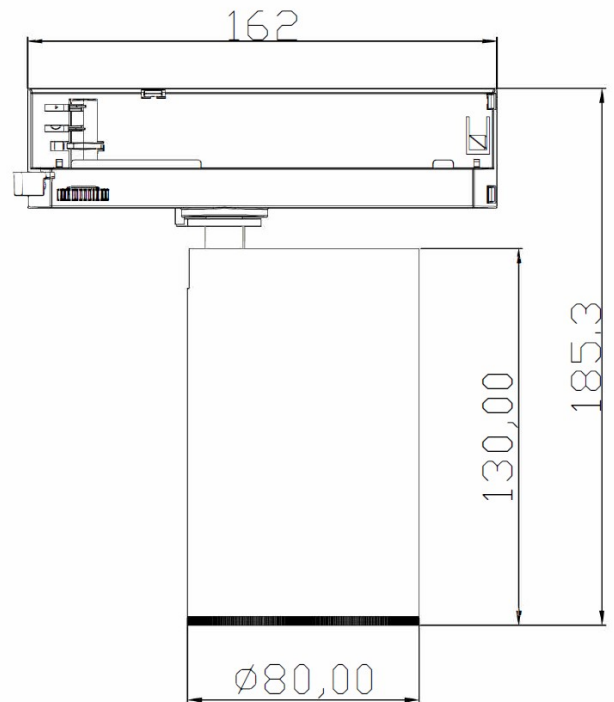

Part No. (3000K)	lm	W	lm/W
LEI/M/1273/15D/3	1273	10	120
LEI/M/2060/15D/3	2060	18	112
LEI/M/2698/15D/3	2698	26	103
LEI/M/978/60D/3	978	7	131
LEI/M/1642/60D/3	1642	13	126
LEI/M/3052/60D/3	3052	28	112


Part No. (4000K)	lm	W	lm/W
LEI/M/1340/15D/4	1340	10	127
LEI/M/2169/15D/4	2169	18	119
LEI/M/2840/15D/4	2840	26	109
LEI/M/1029/60D/4	1029	8	129
LEI/M/2597/60D/4	2597	22	120
LEI/M/3969/60D/4	3969	36	110

Options


For 15° reflector suffix	/15D
For 24° reflector suffix	/24D
For 36° reflector suffix	/36D
For 60° reflector suffix	/60D
For black mounted suffix	/BLK
For white finish suffix	/WHI
For DALI dimmable suffix	/DIM
For Casambi enabled suffix	/CAS
For Surface mounted	/SURF

Leila M Track Spotlight


15° Optic:

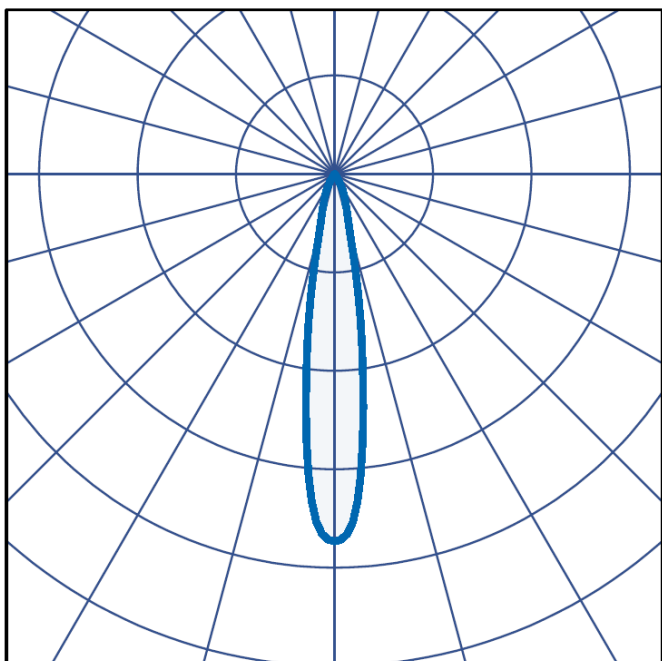

24° Optic:

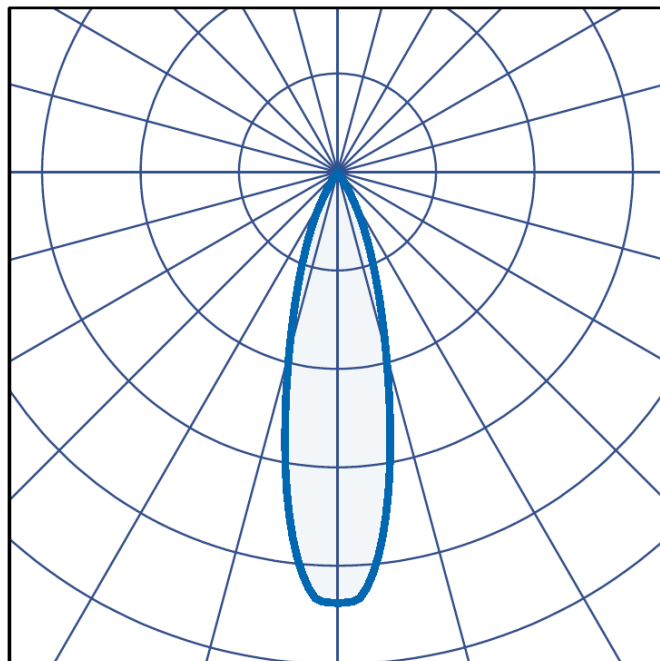

36° Optic:

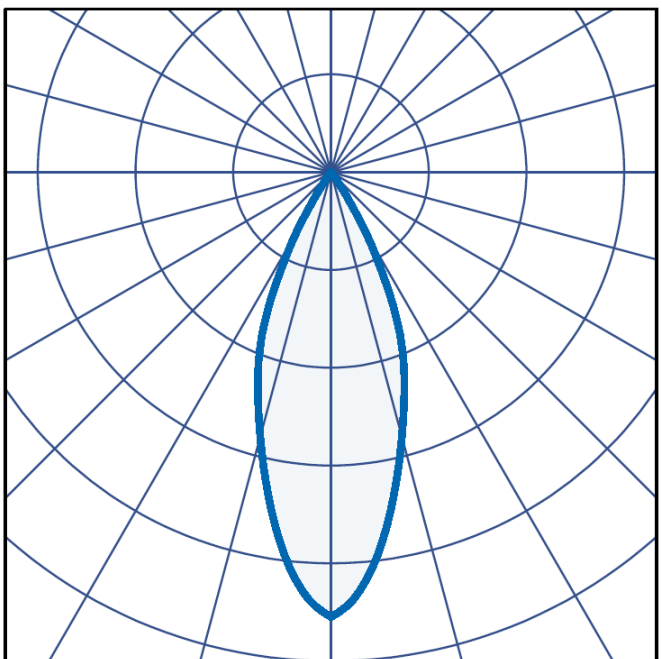

60° Optic:

