

Leila S Track Spotlight




- IP20 suitable for internal environments
- Impact rating of IK02
- Efficacy of up to 111lm/W
- Nominal life-time of 90,000 h (L80/B10)
- Colour stability with 3 step MacAdam
- Surface mounting also available via ceiling rose
- CRI 80 as standard, CRI 90 available on request
- Emergency BLF = 278lm

To Specify:

Select Part Number with additional options if required
e.g. **LEI/S/1280/4/45D/BLK/CAS**

= Leila small trackspot, 11W, 1280lm, 4000K, 45D reflector, black finish, Casambi enabled

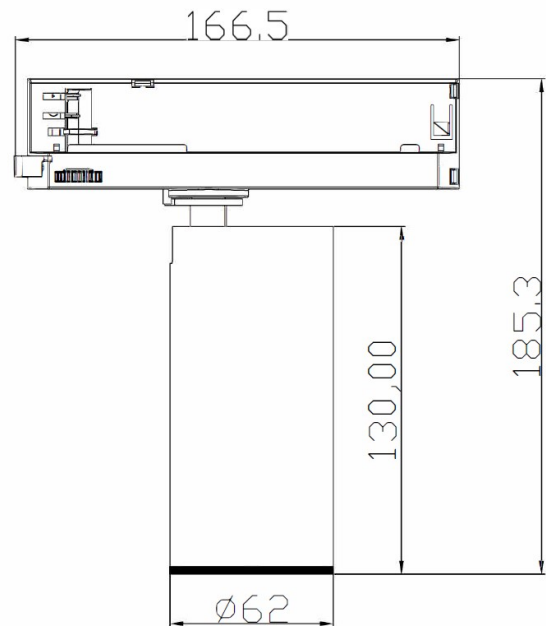

Part No. (3000K)	lm	W	lm/W
LEI/S/1196/15D/3	1196	11	103
LEI/S/1786/15D/3	1786	20	89
LEI/S/1212/30D/3	1212	11	105
LEI/S/1811/30D/3	1811	20	90
LEI/S/1228/45D/3	1228	11	106
LEI/S/1836/45D/3	1836	20	91
LEI/S/1208/60D/3	1208	11	105
LEI/S/1806/60D/3	1806	20	90


Part No. (4000K)	lm	W	lm/W
LEI/S/1246/15D/4	1246	11	108
LEI/S/1861/15D/4	1861	20	93
LEI/S/1263/30D/4	1263	11	110
LEI/S/1887/30D/4	1887	20	90
LEI/S/1280/45D/4	1280	11	111
LEI/S/1913/45D/4	1913	20	95
LEI/S/1259/60D/4	1259	11	105
LEI/S/1882/60D/4	1882	20	94

Options


For 15° reflector suffix	/15D
For 30° reflector suffix	/30D
For 45° reflector suffix	/45D
For 60° reflector suffix	/60D
For black mounted suffix	/BLK
For white finish suffix	/WHI
For DALI dimmable suffix	/DIM
For Casambi enabled suffix	/CAS
For Surface mounted	/SURF

Leila S Track Spotlight


15° Optic:

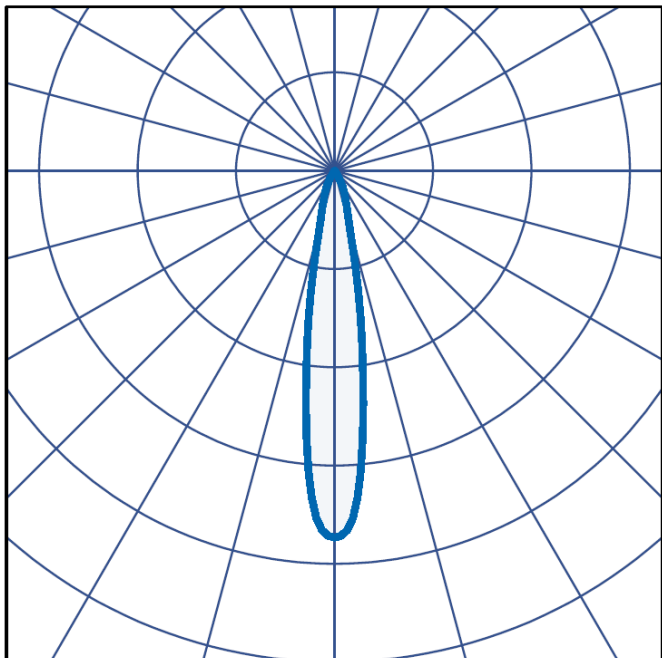

30° Optic:

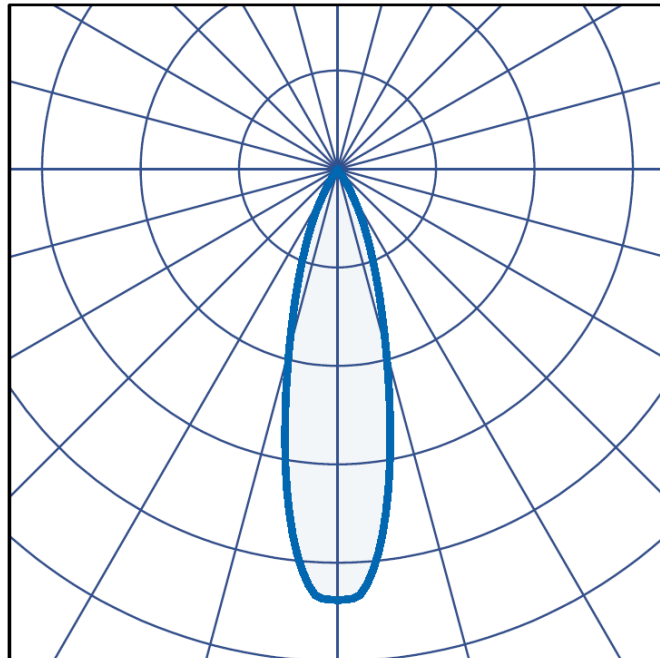

45° Optic:

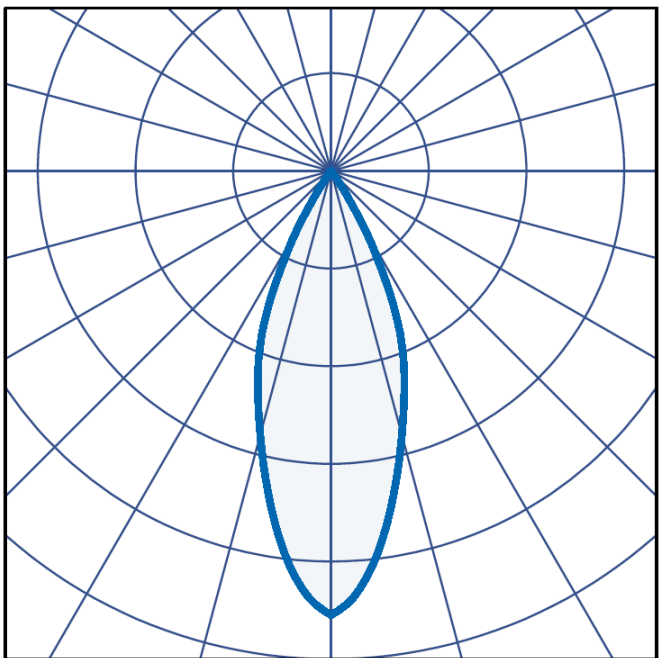

60° Optic:

