



Lena Surface

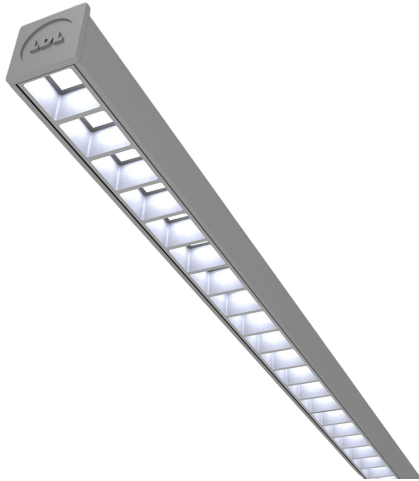

- Efficacies up to 152lm/W
- 72,000 hour life expectancy (L80, B10)
- IP20 suitable for internal environments
- Impact Rating of IK04
- Colour stability with 3 step MacAdam
- Anodised Silver as standard, black and white available on request.
- Emergency BLF = 380lm



To Specify:

Select Part Number with additional options if required e.g. **LENA/11/W/3000/4**

= Lena 1120mm, white louvre, 26W, 3534lm, 4000K

Part No.	L mm	W	Lumen output		
			Black	White	Silver
LENA/5/*/750/4	560	7	702	884	894
LENA/5/*/1000/4	560	9	917	1158	1180
LENA/5/*/1500/4	560	14	1396	1767	1791
LENA/5/*/2000/4	560	18	1791	2263	2303
LENA/5/*/2500/4	560	23	2163	2735	2772
LENA/11/*/1500/4	1120	12	1404	1768	1788
LENA/11/*/2000/4	1120	17	1834	2316	2360
LENA/11/*/3000/4	1120	26	2792	3534	3582
LENA/11/*/4000/4	1120	34	3582	4526	4606
LENA/11/*/5000/4	1120	43	4326	5470	5544
LENA/16/*/2250/4	1680	18	2106	2652	2682
LENA/16/*/3000/4	1680	24	2751	3474	3540
LENA/16/*/4500/4	1680	37	4188	5301	5373
LENA/16/*/6000/4	1680	50	5373	6789	6909
LENA/16/*/7500/4	1680	63	6489	8205	8316
LENA/22/*/3000/4	2240	24	2808	3536	3576
LENA/22/*/4000/4	2240	32	3668	4632	4720
LENA/22/*/6000/4	2240	49	5584	7068	7164
LENA/22/*/8000/4	2240	65	7164	9052	9212
LENA/22/*/10000/4	2240	83	8652	10940	11088

Options

For black grid & 65° optic
 For black grid & 90° optic
 For white grid & 65° optic
 For DALI dimmable suffix
 For Casambi enabled suffix
 For wireless dimmable system suffix
 For 3hr emergency suffix
 For 3hr self-test emergency suffix
 For 3hr DALI emergency suffix
 For wireless addressable emergency
 For wire suspension kit suffix
 For Black finish suffix
 For White finish suffix
 For Anodised Silver finish suffix

LENA/*/B
 LENA/*/W
 LENA/*/S
 /DIM
 /CAS
 /WD
 /EMR
 /ST
 /EMP
 /WAE
 /SUS
 /BLK
 /WHI
 /SIL