


LunaEvo Outdoor Surface



- IP65 suitable for external environments
- Impact rating of IK08
- Efficacy of up to 175lm/W
- Nominal life-time of 102,000h (L90/B10)
- Colour rendering index CRI > 70
- Emergency BLF = 429lm

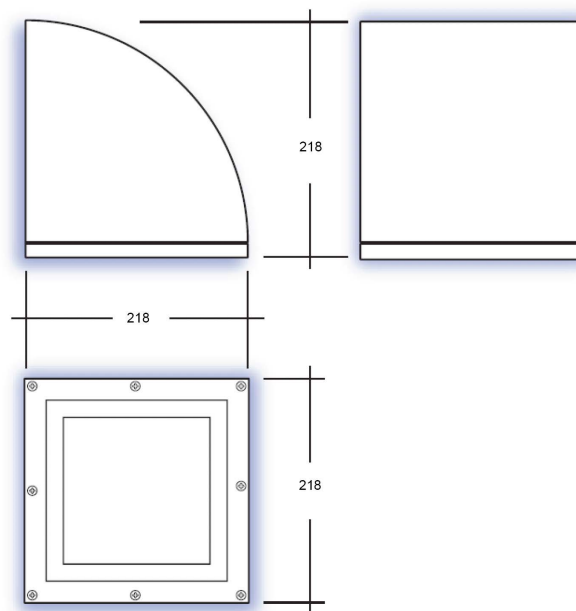

To Specify:

Select Part Number with additional options if required
e.g. **LUN/EVO/L6/2500/74**

= Luna Evo, L6 Wide lens, 2508lm, 15W, 4000K

L4 Flood Lens

Part No.	W	lm	lm/W
LUN/EVO/L4/1300/74	8	1273	170
LUN/EVO/L4/2430/74	15	2433	160
LUN/EVO/L4/3550/74	23	3551	153
LUNE/VO/L4/4640/74	31	4636	148

L6 Wide Pathway

Part No.	W	lm	lm/W
LUN/EVO/L6/1310/74	8	1312	175
LUN/EVO/L6/2500/74	15	2508	165
LUN/EVO/L6/3660/74	23	3661	158
LUN/EVO/L6/4780/74	31	4779	152

Options

For 3 hour Maintained Emergency option suffix

For DALI Dimmable suffix

For 3hr Self-test emergency suffix

For DALI 3hr emergency suffix

For graphite finish suffix

/EMR
/DIM
/ST
/EMP
/GRA

