



Millie Modular System

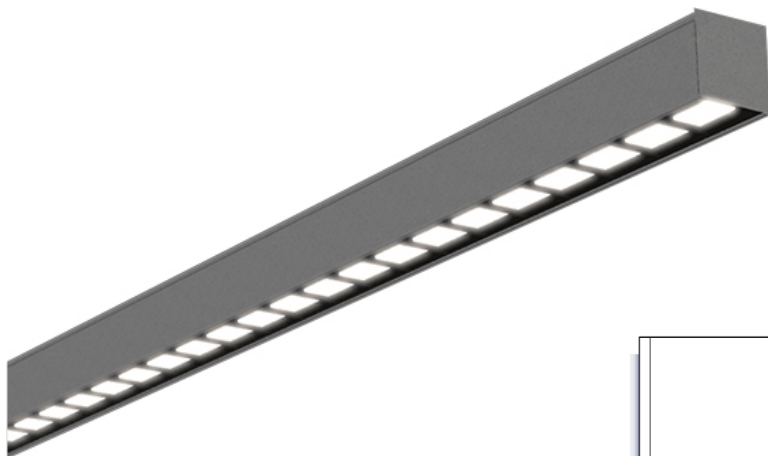

- Low glare UGR <19
- IP20 suitable for internal environments
- Efficacy of up to 140lm/W
- Nominal life-time of 72,000 h (L80/B10)
- Colour stability with 3 step MacAdam
- Impact rating of IK04
- Emergency BLF = 421lm

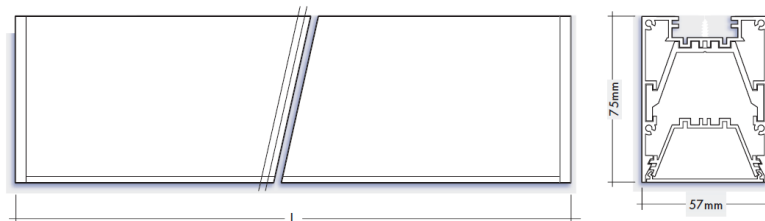

To Specify:


Select Part Number with additional options if required

e.g. **MIL/S/H/MOD/4300/4/BLK/DIM**

= Millie, Surface/Suspended, 1680mm, Modular optics, 4296lm, 31W, 4000K, Black RAL 9005 finish, DALI dimmable

Part No.	W	lm	lm/W
MIL/S/H/MOD/2326/4	18	2330	129
MIL/S/H/MOD/2860/4	22	2864	130
MIL/S/H/MOD/2910/4	22	2908	132
MIL/S/H/MOD/3580/4	26	3580	138
MIL/S/H/MOD/3490/4	25	3489	140
MIL/S/H/MOD/4300/4	31	4296	139

Direct

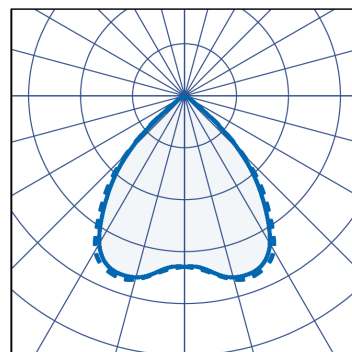


Options

For Surface/Suspended suffix
 For Recessed suffix
 For Black suffix
 For White suffix
 For DALI Dimmable suffix
 For Self-Contained 3hr emergency suffix
 For 3hr Self-test emergency suffix
 For DALI EM-PRO 3hr emergency
 Integral Sensor

/S
 /R
 /B
 /W
 /DIM
 /EMR
 /ST
 /EMP
 /SEN

Direct/In-Direct

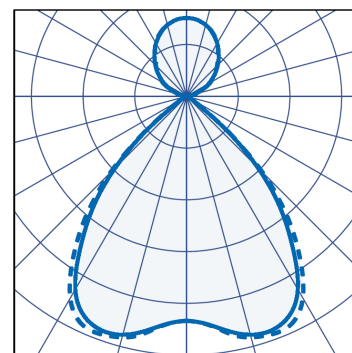

Accessories

For suspended / surface end cap
 For wire suspension kit (2m)
 For wall mounting bracket
 For coupler

MIL/ECS
 MIL/WIRE
 MIL/WALL
 MIL/CPLR

