


Millie Recessed Opal System



- Body and gear tray – aluminium extrusion
- IP20 as standard, IP44 available on request
- Efficacy of up to 161lm/W
- Nominal life-time of 100,000 h (L80/B10)
- Colour stability with 3 step MacAdam
- Opal frosted diffuser – polycarbonate TP(a)
- Optics – PMMA TP(b)
- Modular optics – shade polycarbonate, optic – PMMA
- Colours: RAL 9003 White, RAL 9005 Black & RAL 9006 Grey
- Lengths available: 570mm, 850mm, 1130mm, 1410mm, 1690mm, 1970mm, 2250mm, 2530mm, 2810mm, 3090mm, 3370mm
- Opal Emergency BLF = 416lm
- 90° Emergency BLF = 430lm

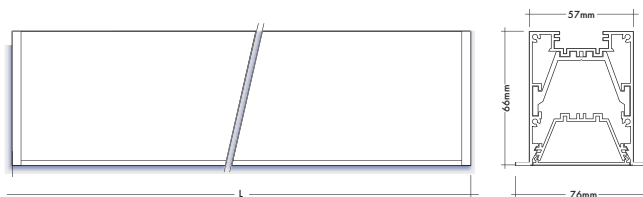

To Specify:

Select Part Number with additional options if required

e.g. **MIL/R/16/OP/3925/4/BLK/DIM**


= Millie, Recessed, 1690mm, Opal, 3925lm, 28W, 4000K, Black RAL 9005 finish, DALI dimmable

Part No.	Lm	W	Lm/W	BLF	Weight	L (mm)
MIL/R/11/OP/1307/4	1307	9	140	413	2.6kg	1130
MIL/R/11/OP/2616/4	2616	19	137	413	2.6kg	1130
MIL/R/11/OP/3836/4	3836	29	132	413	2.6kg	1130
MIL/R/16/OP/1961/4	1961	14	136	416	3.8kg	1690
MIL/R/16/OP/3925/4	3925	28	137	416	3.8kg	1690
MIL/R/16/OP/5753/4	5753	43	132	416	3.8kg	1690
MIL/R/22/OP/2614/4	2614	18	140	417	5.2kg	2250
MIL/R/22/OP/5232/4	5232	38	137	417	5.2kg	2250
MIL/R/22/OP/7671/4	7671	58	132	417	5.2kg	2250

Options

For 4000K suffix
 For 3000K suffix
 For white finish suffix
 For black finish suffix
 For grey finish suffix
 For Casambi enabled suffix
 For DALI Dimmable suffix
 For wireless DALI suffix
 For 3hr integral emergency suffix
 For 3hr self-test emergency suffix
 For DALI addressable emergency suffix
 For wireless DALI addressable emergency
 For 90° low glare optic
 For Asymmetric wall wash optic
 For Double asymmetric optic
 Integral Sensor

/4
 /3
 /WHI
 /BLK
 /GRY
 /CAS
 /DIM
 /WD
 /EMR
 /ST
 /EMP
 /WAE
 /90
 /AS
 /DA
 /SEN

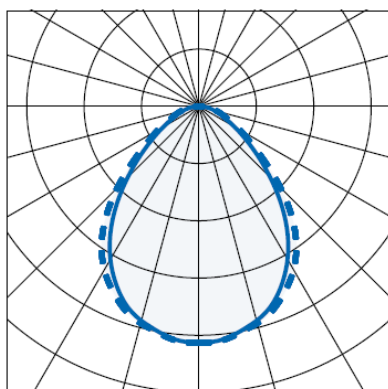


Accessories

Recessed end cap
 Recessing bracket
 Coupler

/MIL/ECR
 /MIL/R/BRKT
 /MIL/CPLR


Fitting Lengths (mm)

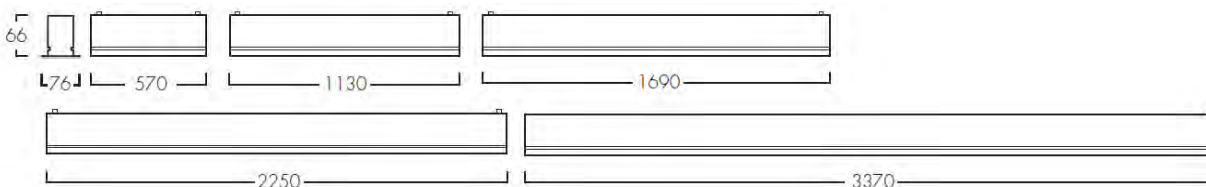

Millie Recessed Microprismatic System



- Body and gear tray - aluminium extrusion
- IP20 as standard, IP44 available on request
- Efficacy of up to 161lm/W
- Nominal life-time of 100,000 h (L80/B10)
- Colour stability with 3 step MacAdam
- Opal frosted diffuser - polycarbonate TP(a)
- Optics - PMMA TP(b)
- Modular optics - shade polycarbonate, optic - PMMA
- Colours: RAL 9003 White, RAL 9005 Black & RAL 9006 Grey
- Lengths available: 570mm, 850mm, 1130mm, 1410mm, 1690mm, 1970mm, 2250mm, 2530mm, 2810mm, 3090mm, 3370mm
- Opal Emergency BLF = 416lm
- 90° Emergency BLF = 430lm

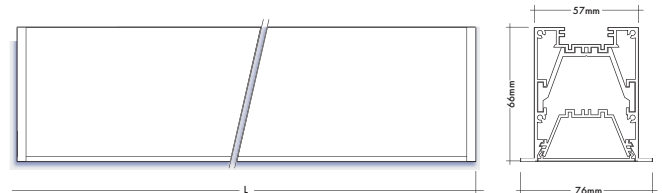

To Specify:

Select Part Number with additional options if required

e.g. **MIL/R/22/MP/2544/4/BLK/DIM**


= Millie, Recessed, 2250mm, Microprismatic, 2544lm, 18W, 4000K, Black RAL 9005 finish, DALI dimmable

Part No.	Lm	W	Lm/W	Weight	L (mm)
MIL/R/11/MP/1272/4	1272	9	136	2.6kg	1130
MIL/R/11/MP/2546/4	2546	19	133	2.6kg	1130
MIL/R/11/MP/3732/4	3732	29	128	2.6kg	1130
MIL/R/16/MP/1908/4	1908	14	132	3.8kg	1690
MIL/R/16/MP/3819/4	3819	28	133	3.8kg	1690
MIL/R/16/MP/5598/4	5598	43	128	3.8kg	1690
MIL/R/22/MP/2544/4	2544	18	136	5.2kg	2250
MIL/R/22/MP/5091/4	5091	38	133	5.2kg	2250
MIL/R/22/MP/7464/4	7464	58	128	5.2kg	2250

Options

- For 4000K suffix
- For 3000K suffix
- For white finish suffix
- For black finish suffix
- For grey finish suffix
- For Casambi enabled suffix
- For DALI Dimmable suffix
- For wireless DALI suffix
- For 3hr integral emergency suffix
- For 3hr self-test emergency suffix
- For DALI addressable emergency suffix
- For wireless DALI addressable emergency
- For 90° low glare optic
- For Asymmetric wall wash optic
- For Double asymmetric optic
- Integral Sensor

/4
/3
/WHI
/BLK
/GRY
/CAS
/DIM
/WD
/EMR
/ST
/EMP
/WAE
/90
/AS
/DA
/SEN

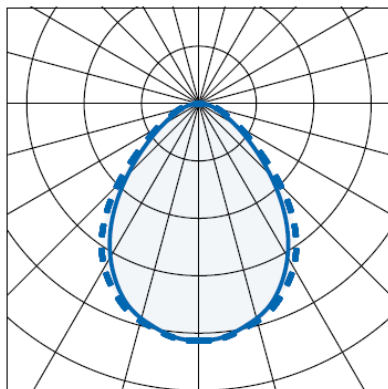

Accessories

- Recessed end cap
- Recessing bracket
- Coupler

/MIL/ECR
/MIL/R/BRKT
/MIL/CPLR

Fitting Lengths (mm)

