


Millie Suspended Opal System



- Body and gear tray - aluminium extrusion
- IP20 as standard, IP44 available on request
- Efficacy of up to 161lm/W
- Nominal life-time of 100,000 h (L80/B10)
- Colour stability with 3 step MacAdam
- Opal frosted diffuser - polycarbonate TP(a)
- Optics - PMMA TP(b)
- Modular optics - shade polycarbonate, optic - PMMA
- Colours: RAL 9003 White, RAL 9005 Black & RAL 9006 Grey
- Lengths available: 570mm, 850mm, 1130mm, 1410mm, 1690mm, 1970mm, 2250mm, 2530mm, 2810mm, 3090mm, 3370mm
- Opal Emergency BLF = 416lm
- 90° Emergency BLF = 430lm

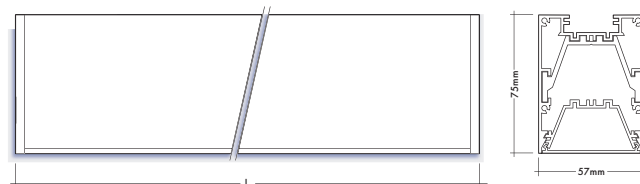

To Specify:

Select Part Number with additional options if required

e.g. **MIL/S/16/OP/3925/4/BLK/DIM**

= Millie, Suspended, 1690mm, Opal, 3925lm, 28W, 4000K, Black RAL 9005 finish, DALI dimmable

Direct Only	Lm	W	Lm/W	BLF	Weight	L (mm)
MIL/S/11/OP/1307/4	1307	9	140	413	2.6kg	1130
MIL/S/11/OP/2616/4	2616	19	137	413	2.6kg	1130
MIL/S/11/OP/3836/4	3836	29	132	413	2.6kg	1130
MIL/S/16/OP/1961/4	1961	14	136	416	3.8kg	1690
MIL/S/16/OP/3925/4	3925	28	137	416	3.8kg	1690
MIL/S/16/OP/5753/4	5753	43	132	416	3.8kg	1690
MIL/S/22/OP/2614/4	2614	18	140	417	5.2kg	2250
MIL/S/22/OP/5232/4	5232	38	137	417	5.2kg	2250
MIL/S/22/OP/7671/4	7671	58	132	417	5.2kg	2250

Options

For 4000K suffix
For 3000K suffix
For white finish suffix
For black finish suffix
For grey finish suffix
For Casambi enabled suffix
For DALI Dimmable suffix
For wireless DALI suffix
For 3hr integral emergency suffix
For 3hr self-test emergency suffix
For DALI addressable emergency suffix
For wireless DALI addressable emergency
For 90° low glare optic
For Asymmetric wall wash optic
For Double asymmetric optic
Integral Sensor

/4
/3
/WHI
/BLK
/GRY
/CAS
/DIM
/WD
/EMR
/ST
/EMP
/WAE
/90
/AS
/DA
/SEN


Direct/In-Direct	Lm	W	Lm/W	Weight	L (mm)
MIL/DI/11/OP/1750/4	1746	14	126	2.9kg	1130
MIL/DI/11/OP/2570/4	2565	20	128	2.9kg	1130
MIL/DI/11/OP/3389/4	3389	27	128	2.9kg	1130
MIL/DI/16/OP/2780/4	2784	21	135	4.2kg	1690
MIL/DI/16/OP/4120/4	4117	30	136	4.2kg	1690
MIL/DI/16/OP/5450/4	5450	40	135	4.2kg	1690
MIL/DI/22/OP/3500/4	3498	28	126	5.8kg	2250
MIL/DI/22/OP/5130/4	5134	40	128	5.8kg	2250
MIL/DI/22/OP/6780/4	6782	53	128	5.8kg	2250

Accessories


Suspended / Surface end cap
Wire suspension kit (2m)
Wall mounting bracket
Coupler

/MIL/ECS
/MIL/WIRE
/MIL/WALL
/MIL/CPLR


Direct



Direct/In-Direct



Fitting Lengths (mm)

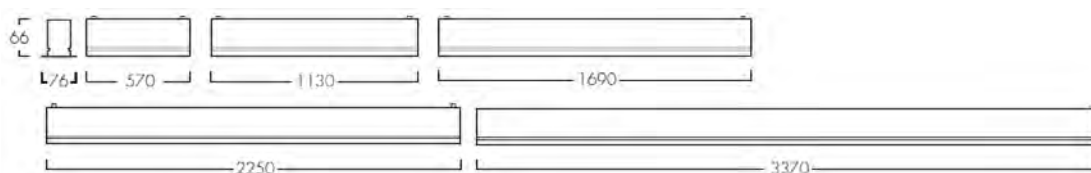

Millie Suspended Microprismatic System




- Body and gear tray - aluminium extrusion
- IP20 as standard, IP44 available on request
- Efficacy of up to 161lm/W
- Nominal life-time of 100,000 h (L80/B10)
- Colour stability with 3 step MacAdam
- Opal frosted diffuser - polycarbonate TP(a)
- Optics - PMMA TP(b)
- Modular optics - shade polycarbonate, optic - PMMA
- Colours: RAL 9003 White, RAL 9005 Black & RAL 9006 Grey
- Lengths available: 570mm, 850mm, 1130mm, 1410mm, 1690mm, 1970mm, 2250mm, 2530mm, 2810mm, 3090mm, 3370mm
- Opal Emergency BLF = 416lm
- 90° Emergency BLF = 430lm

To Specify:

Select Part Number with additional options if required

e.g. **MIL/S/22/MP/2544/4/BLK/DIM**

= Millie, Suspended, 2250mm, Microprismatic, 2544lm, 18W, 4000K, Black RAL 9005 finish, DALI dimmable

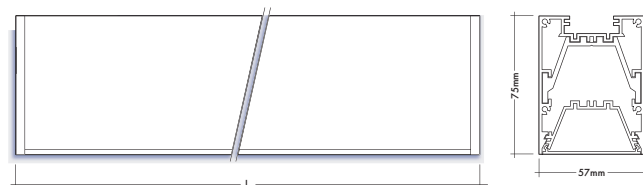

Direct Only	Lm	W	Lm/W	Weight	L (mm)
MIL/S/11/MP/1272/4	1272	9	136	2.6kg	1130
MIL/S/11/MP/2546/4	2546	19	133	2.6kg	1130
MIL/S/11/MP/3732/4	3732	29	128	2.6kg	1130
MIL/S/16/MP/1908/4	1908	14	132	3.8kg	1690
MIL/S/16/MP/3819/4	3819	28	133	3.8kg	1690
MIL/S/16/MP/5598/4	5598	43	128	3.8kg	1690
MIL/S/22/MP/2544/4	2544	18	136	5.2kg	2250
MIL/S/22/MP/5091/4	5091	38	133	5.2kg	2250
MIL/S/22/MP/7464/4	7464	58	128	5.2kg	2250

Options

For 4000K suffix
For 3000K suffix
For white finish suffix
For black finish suffix
For grey finish suffix
For Casambi enabled suffix
For DALI Dimmable suffix
For wireless DALI suffix
For 3hr integral emergency suffix
For 3hr self-test emergency suffix
For DALI addressable emergency suffix
For wireless DALI addressable emergency
For 90° low glare optic
For Asymmetric wall wash optic
For Double asymmetric optic
Integral Sensor


/4
/3
/WHI
/BLK
/GRY
/CAS
/DIM
/WD
/EMR
/ST
/EMP
/WAE
/90
/AS
/DA
/SEN

Direct/In-Direct	Lm	W	Lm/W	Weight	L (mm)
MIL/DI/11/MP/1300/4	1296	11	115	2.9kg	1130
MIL/DI/11/MP/1710/4	1707	14	123	2.9kg	1130
MIL/DI/11/MP/2620/4	2616	20	130	2.9kg	1130
MIL/DI/16/MP/1900/4	1904	16	117	4.2kg	1690
MIL/DI/16/MP/2730/4	2730	21	133	4.2kg	1690
MIL/DI/16/MP/5210/4	5214	40	129	4.2kg	1690
MIL/DI/22/MP/2590/4	2929	23	115	5.8kg	2250
MIL/DI/22/MP/3410/4	3414	28	123	5.8kg	2250
MIL/DI/22/MP/5230/4	5232	40	130	5.8kg	2250

Accessories

Suspended / Surface end cap
Wire suspension kit (2m)
Wall mounting bracket
Coupler

/MIL/ECS
/MIL/WIRE
/MIL/WALL
/MIL/CPLR

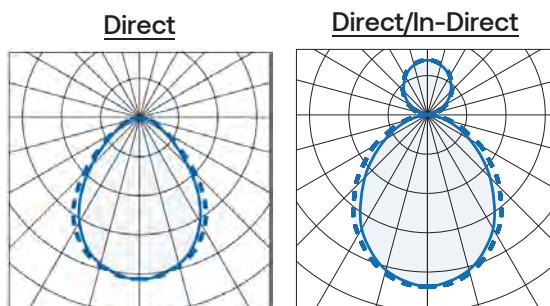

Fitting Lengths (mm)

