

Millie Track Opal Linear Track Luminaire



- IP20 as standard, IP44 available on request
- Body and gear tray - aluminium extrusion
- Opal frosted diffuser - polycarbonate TP(a)
- Optics - PMMA TP(b)
- Modular optics - shade polycarbonate, optic - PMMA
- Colours: RAL 9003 White, RAL 9005 Black & RAL 9006 Grey
- Lengths available: 570mm, 850mm, 1130mm, 1410mm & 1690mm
- Opal Emergency BLF = 416lm
- 90° Emergency BLF = 430lm



To Specify:

Select Part Number with additional options if required

e.g. **MIL/T/5/OP/940/4/BLK**

= Millie, Track, 570mm, opal, 944lm, 8W, 4000K, Black RAL 9005 finish

Part No.	Lm	W	Lm/W	Weight	L (mm)
MIL/T/5/OP/630/4	633	6	108	2.5kg	570
MIL/T/5/OP/940/4	944	8	113	2.5kg	570
MIL/T/5/OP/1250/4	1250	11	115	2.5kg	570
MIL/T/8/OP/954/4	954	8	136	3.2kg	850
MIL/T/8/OP/1910/4	1910	12	133	3.2kg	850
MIL/T/8/OP/2799/4	2799	16	128	3.2kg	850
MIL/T/11/OP/1270/4	1265	11	117	4.4kg	1130
MIL/T/11/OP/1890/4	1887	15	124	4.4kg	1130
MIL/T/11/OP/2500/4	2499	20	126	4.4kg	1130
MIL/T/14/OP/1800/4	1785	14	128	5.1kg	1400
MIL/T/16/OP/2020/4	2020	15	135	6.4kg	1680
MIL/T/16/OP/3013/4	3013	22	139	6.4kg	1680
MIL/T/16/OP/3990/4	3993	29	139	6.4kg	1680

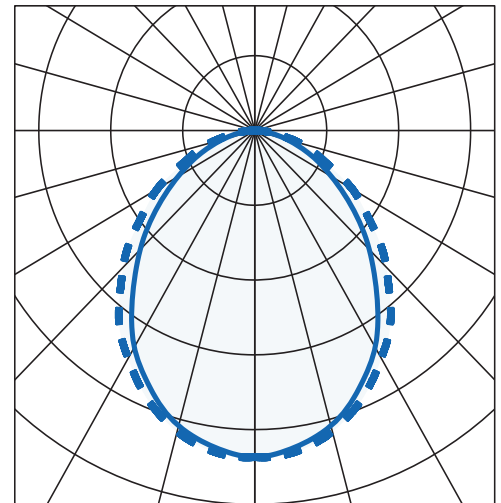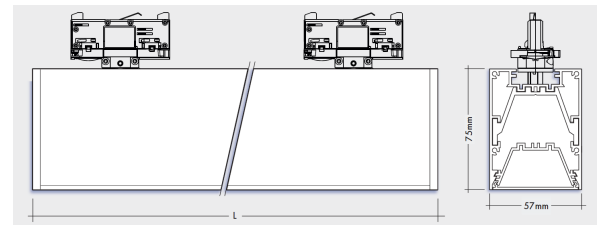

Options

For 4000K suffix	/4
For 3000K suffix	/3
For white finish suffix	/WHI
For black finish suffix	/BLK
For grey finish suffix	/GRY
For Casambi enabled suffix	/CAS
For DALI Dimmable suffix	/DIM
For wireless DALI suffix	/WD
For 3hr integral emergency suffix	/EMR
For 3hr self-test emergency suffix	/ST
For DALI addressable emergency suffix	/EMP
For wireless DALI addressable emergency	/WAE
Integral Sensor	/SEN

Millie Track Microprismatic Linear Track Luminaire



To Specify:



Select Part Number with additional options if required

e.g. **MIL/T/5/MP/929/4/BLK**

= Millie, Track, 570mm, microprismatic, 929lm, 7W, 4000K, Black
RAL 9005 finish

- IP20 as standard, IP44 available on request
- Body and gear tray - aluminium extrusion
- Opal frosted diffuser - polycarbonate TP(a)
- Optics - PMMA TP(b)
- Modular optics - shade polycarbonate, optic - PMMA
- Colours: RAL 9003 White, RAL 9005 Black & RAL 9006 Grey
- Lengths available: 570mm, 850mm, 1130mm, 1410mm & 1690mm
- Opal Emergency BLF = 416lm
- 90° Emergency BLF = 430lm

Part No.	Lm	W	Lm/W	Weight	L (mm)
MIL/T/5/MP/630/4	633	6	108	2.5kg	570
MIL/T/5/MP/940/4	944	8	113	2.5kg	570
MIL/T/5/MP/1250/4	1250	11	115	2.5kg	570
MIL/T/8/MP/929/4	929	7	133	3.2kg	850
MIL/T/8/MP/1858/4	1858	14	130	3.2kg	850
MIL/T/8/MP/2724/4	2724	21	125	3.2kg	850
MIL/T/11/MP/1270/4	1265	11	117	4.4kg	1130
MIL/T/11/MP/1890/4	1887	15	124	4.4kg	1130
MIL/T/11/MP/2500/4	2499	20	126	4.4kg	1130
MIL/T/14/OP/1800/4	1785	14	128	5.1kg	1400
MIL/T/16/OP/2020/4	2020	15	135	6.4kg	1680
MIL/T/16/OP/3013/4	3013	22	139	6.4kg	1680
MIL/T/16/OP/3990/4	3993	29	139	6.4kg	1680

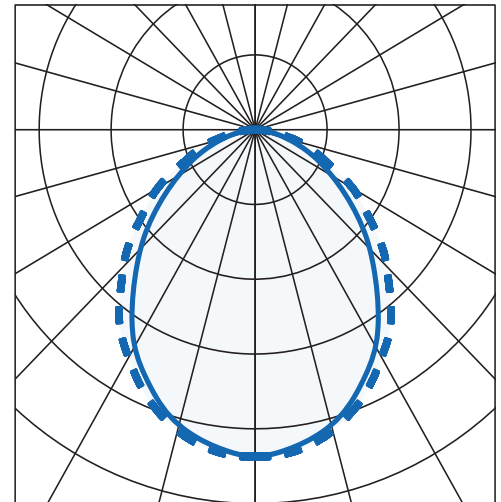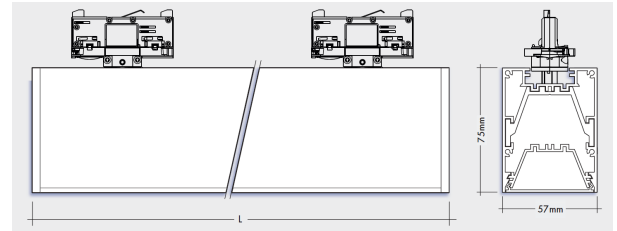

Options

For 4000K suffix	/4
For 3000K suffix	/3
For white finish suffix	/WHI
For black finish suffix	/BLK
For grey finish suffix	/GRY
For Casambi enabled suffix	/CAS
For DALI Dimmable suffix	/DIM
For wireless DALI suffix	/WD
For 3hr integral emergency suffix	/EMR
For 3hr self-test emergency suffix	/ST
For DALI addressable emergency suffix	/EMP
For wireless DALI addressable emergency	/WAE
Integral Sensor	/SEN