

Molly Pendant



To Specify:


Select Part Number with additional options if required

e.g. **MOL/3000/40/DIM/GRY**

= Molly LED hibay, 3000lm, 4000K, DALI dimmable c/w grey housing.

Part No.	W	lm	lm/W	D(mm)
MOL/1100	10	1100	110	ø600
MOL/2075	20	2075	103	ø600
MOL/2975	30	2975	99	ø600
MOL/4550	46	4550	98	ø1200

- IP20 suitable for internal environments
- Impact rating of IK04
- Efficacy of up to 110lm/W
- Nominal life-time of 60,000 h (L70/B10)
- Colour stability with 3 step MacAdam
- High colour rendering index CRI > 90
- Emergency BLF = 275lm

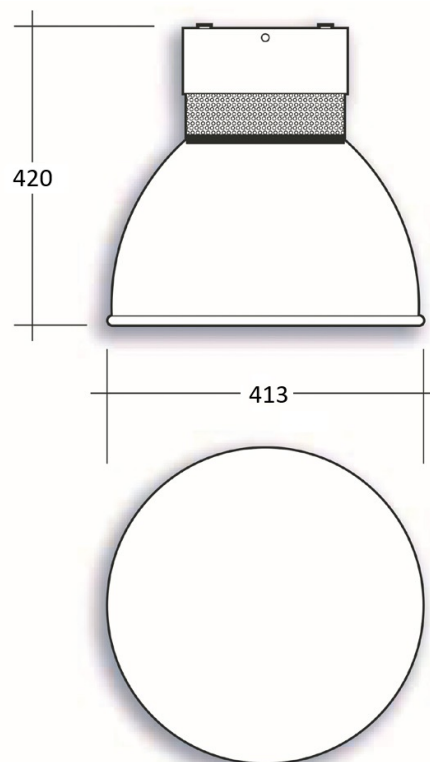

Options

For 3000K colour temperature suffix

For 4000K colour temperature suffix

For DALI Dimmable suffix

For white gear housing suffix

For grey gear housing suffix

For black gear housing suffix

/3
/4
/DIM
/WHI
/GRY
/BLK

