


Noma Pendant



- IP20 suitable for internal environments
- Impact rating of IK02
- Efficacy of up to 158lm/W
- Nominal life-time of 50,000 h (L90/B10)
- Colour stability with 3 step MacAdam
- Emergency BLF = 369lm

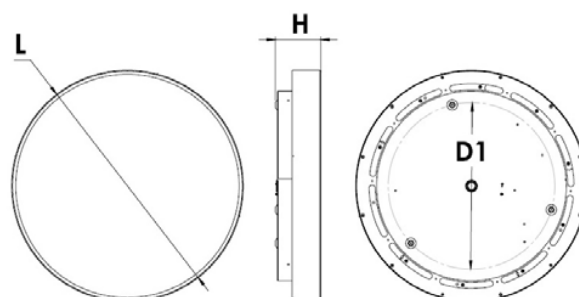


L, mm	H, mm	D1, mm
450	89	324
600	89	474
900	89	774

To Specify:

Select Part Number with additional options if required
e.g. **NOM/6/7660/3/DIM**

= Noma, ø600, 7658lm, 53W, 3000K, DALI Dimmable

Part No.	W	lm	lm/W	L(mm)	CCT
NOM/4/3650/3	26	3652	141	450	3000
NOM/4/3820/4	26	3824	151	450	4000
NOM/4/5100/3	36	5095	142	450	3000
NOM/4/5330/4	36	5334	152	450	4000
NOM/6/5480/3	38	5480	145	600	3000
NOM/6/5740/4	38	5737	155	600	4000
NOM/6/7660/3	53	7658	146	600	3000
NOM/6/8020/4	53	8017	156	600	4000
NOM/9/8740/3	59	8741	147	900	3000
NOM/9/9150/4	59	9152	158	900	4000
NOM/9/11690/3	80	11688	147	900	3000
NOM/9/12240/4	80	12237	157	900	4000

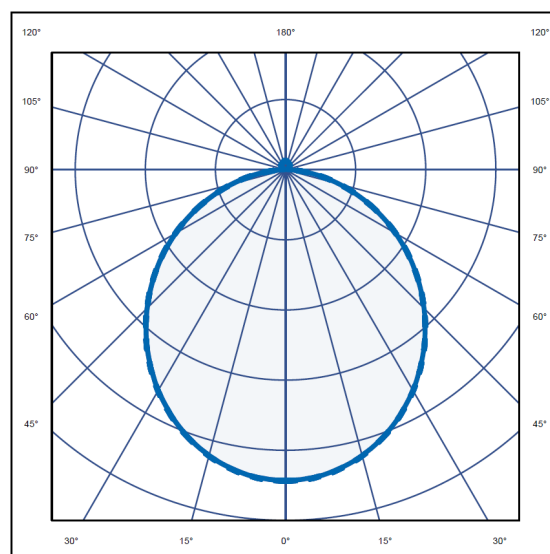

Options

For DALI Dimmable suffix
For Casambi enabled suffix
For wireless dimmable suffix
For 3 hr emergency suffix
For self-test suffix
For DALI addressable emergency suffix
For wireless addressable emergency suffix
For wire suspension kit suffix

/DIM
/CAS
/WD
/EMR
/ST
/EMP
/WAE
/SUS