


# Oscar Downlighter




- Efficacies up to 112lm/W
- Impact rating of IK04
- IP20
- Nominal life-time of 90,000h (L80/B10)
- Colour stability with 3 step MacAdam
- CRI > 80 as standard, CRI > 90 available on request
- 4000K, 3000k and 2700K available on request
- Emergency BLF = 280lm

## To Specify:

Select Part Number with additional options if required e.g. **OSC/1370/60/4/BLK/CAS**  
 = Oscar downlight, 1370 lumens, 12W, 60°, 4000K, black bezel & Casambi enabled.

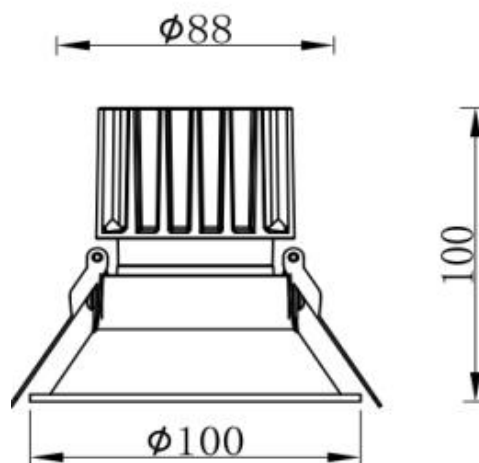

| Part No.             | W  | lm   | lm/W | Beam | CCT   |
|----------------------|----|------|------|------|-------|
| <b>OSC/910/60/4</b>  | 9  | 910  | 106  | 60   | 4000K |
| <b>OSC/1126/60/4</b> | 10 | 1126 | 108  | 60   | 4000K |
| <b>OSC/1370/60/4</b> | 12 | 1370 | 112  | 60   | 4000K |
| <b>OSC/1564/60/4</b> | 14 | 1564 | 111  | 60   | 4000K |
| <b>OSC/1803/60/4</b> | 16 | 1803 | 110  | 60   | 4000K |
| <b>OSC/1970/60/4</b> | 18 | 1970 | 108  | 60   | 4000K |

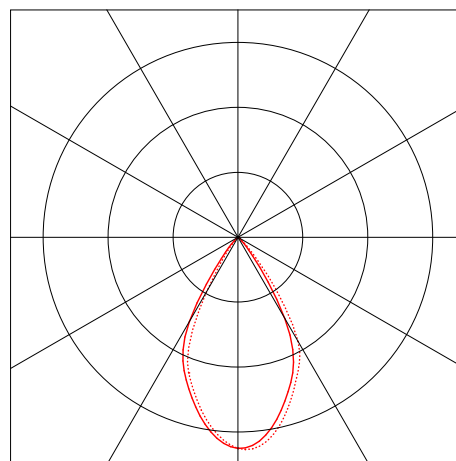

## Options

For a black finish suffix  
 For a white finish suffix  
 For DALI dimmable suffix  
 For Casambi enabled suffix  
 For leading/trailing edge dimmable suffix  
 For 3hr emergency suffix  
 For self-test emergency suffix  
 For DALI addressable emergency suffix

/BLK  
 /WHI  
 /DIM  
 /CAS  
 /MDIM  
 /EMR  
 /ST  
 /EMP