

Ruby Downlighter




To Specify:


Select Part Number with additional options if required e.g. **RUB/540/15/4/WHI/CAS**

= Ruby downlight, 540 lumens, 6W, 15°, 4000K, white bezel & Casambi enabled


- Efficacies up to 121lm/W
- IP20
- Colour stability with 3 step MacAdam
- CRI > 80 as standard, CRI > 90 available on request
- Alternate beam angles available: 15/24/38/60°
- Emergency BLF = 303lm

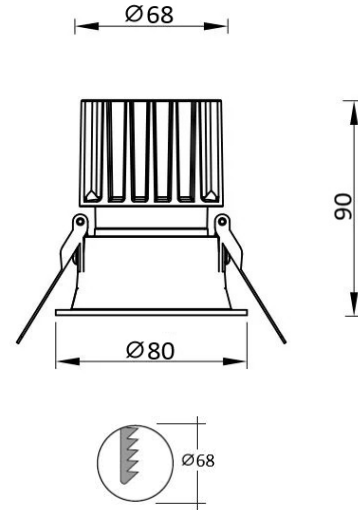

15° Reflector

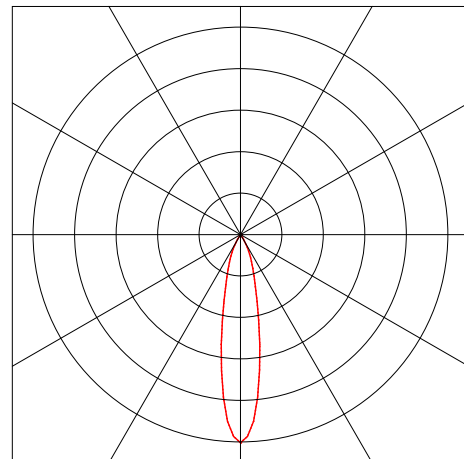

60° Reflector

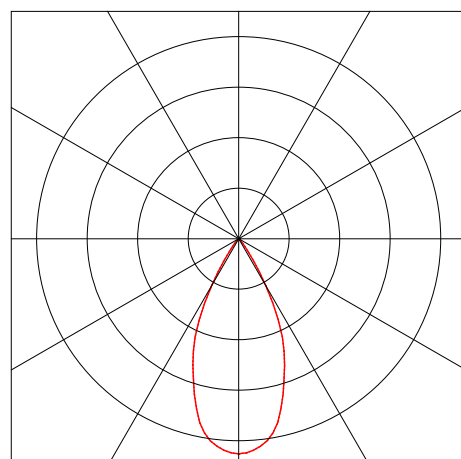

Part No.	W	lm	lm/W	Beam	CCT
RUB/502/15/3	6	502	90	15	3000K
RUB/540/15/4	6	540	97	15	4000K
RUB/925/15/3	9	925	101	15	3000K
RUB/994/15/4	9	994	108	15	4000K
RUB/1326/15/3	13	1326	102	15	3000K
RUB/1426/15/4	13	1426	110	15	4000K
RUB/552/60/3	6	552	99	60	3000K
RUB/594/60/4	6	594	106	60	4000K
RUB/1016/60/3	9	1016	111	60	3000K
RUB/1093/60/4	9	1093	119	60	4000K
RUB/1458/60/3	13	1458	112	60	3000K
RUB/1568/60/4	13	1568	121	60	4000K

Options

For a black finish suffix

For a white finish suffix

For DALI dimmable suffix

For Casambi enabled suffix

For 3hr emergency suffix

For self-test emergency suffix

For DALI addressable emergency suffix

For Wireless Addressable Emergency

/BLK

/WHI

/DIM

/CAS

/EMR

/ST

/EMP

/WAE