


Talia Pendant



- IP40 suitable for internal environments
- Efficacy of up to 138lm/W
- Nominal life-time of 100,000 h (L80/B10)
- Impact rating of IK01
- Colour stability with 3 step MacAdam
- CRI 80 as standard, CRI 90 available on request
- Emergency BLF = 345lm

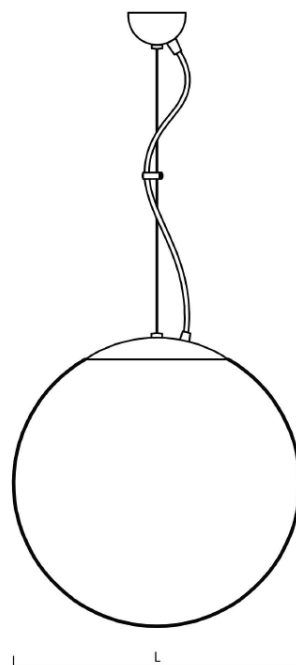

T2 T3
L - 200 L - 300

T4 T5
L - 400 L - 500

T6
L - 600

To Specify:

Select Part Number with additional options if required
e.g. **TAL/2760/4**

= Talia, 20w, 2760lm, 4000K

Part No.	W	lm	lm/W	CCT
TAL/2/1000/4	9	1000	111	4000K
TAL/3/2760/4	20	2760	138	4000K
TAL/4/3620/4	27	3620	134	4000K
TAL/5/5450/4	41	5450	138	4000K
TAL/6/6290/4	48	6290	131	4000K

Options

For wireless dimmable system suffix
For Casambi enabled suffix
For DALI Dimmable suffix

/WD
/CAS
/DIM