


Walton Linear Surface – Anti Ligature

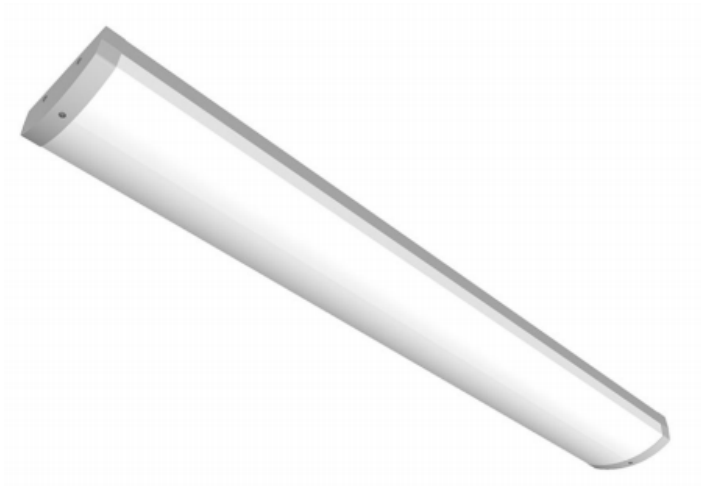

- IP54 suitable for internal environments, IP65 also available
- Impact rating of IK12
- Efficacy of up to 148lm/W
- Nominal life-time of 100,000h (L80/B10)
- Emergency BLF = 370lm

To Specify:

Select Part Number with additional options if required

e.g. **WAL/5/5935/4/DIM/EMR**

= Walton LED surface luminaire, 5935lm, 4K, DALI Dimmable/w 3hr emergency.

Part No.	W	lm	lm/W	L(mm)
WAL/2/1415/4	10	1415	148	580
WAL/2/2350/4	17	2350	137	580
WAL/2/3262/4	25	3262	131	580
WAL/4/2828/4	19	2828	148	1190
WAL/4/4759/4	34	4759	139	1190
WAL/4/6524/4	50	6524	131	1190
WAL/5/3526/4	24	3526	148	1470
WAL/5/5935/4	42	5935	139	1470
WAL/5/8241/4	62	8241	132	1470

Options

For 3 hour Maintained Emergency option suffix

For DALI Dimmable suffix

For 3hr Self-test emergency suffix

For DALI 3hr emergency suffix

/EMR
/DIM
/ST
/EMP

