



Wayland Anti-Ligature

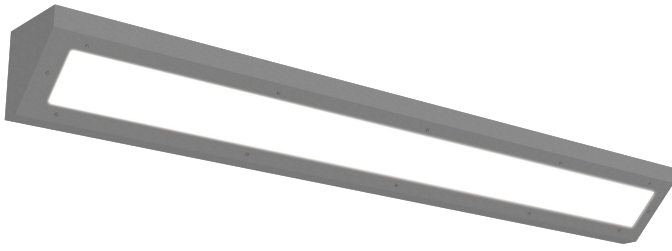

- IP65 suitable for harsh industrial environments
- Impact rating of IK10
- Efficacy of up to 164lm/W
- Nominal life-time of 100,000h (L80/B10)
- Emergency BLF = 410lm

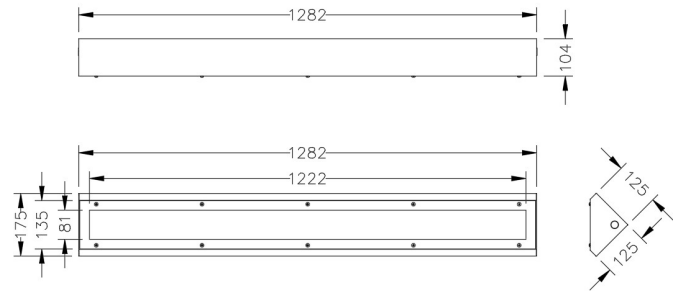


To Specify:

Select Part Number with additional options if required e.g. **WAY/12/5000/4/DIM**

= Wayland 1282mm, 5081lm, 34W, 4000K, DALI dimmable

Part No.	W	lm	lm/W
WAY/12/3048/4	19	3048	162
WAY/12/5081/4	34	5081	151
WAY/12/7078/4	49	7078	144
WAY/17/3811/4	23	3811	164
WAY/17/6351/4	42	6351	151
WAY/17/8848/4	62	8848	144

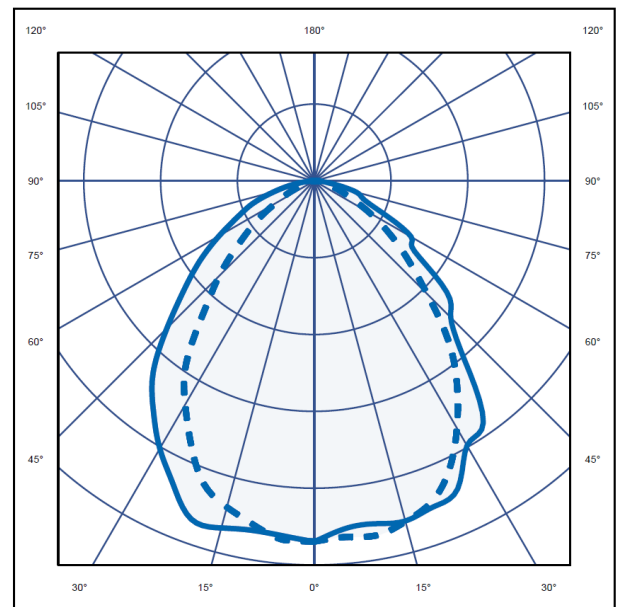

Options

For 3 hour Maintained Emergency option suffix
 For DALI Dimmable suffix
 For 3hr Self-test emergency suffix
 For DALI 3hr emergency suffix
 For Casambi enabled suffix
 For wireless dimmable system suffix
 For wireless addressable emergency suffix

/EMR
 /DIM
 /ST
 /EMP
 /CAS
 /WD
 /WAE