

Cora Floodlight



- IP66 suitable for external environments
- Impact rating of IK10
- Efficacy of up to 92lm/W
- Nominal life-time of 102,000h (L90/B10)
- Various optics available

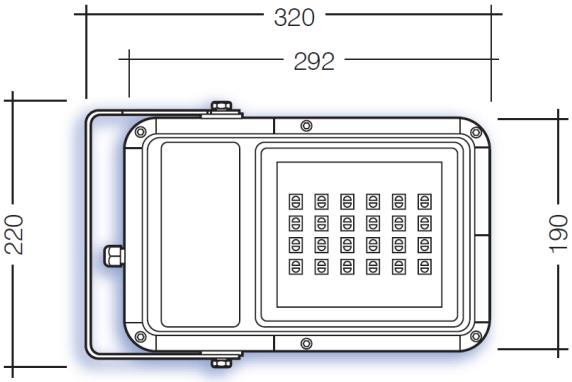




To Specify:

Select Part Number with additional options if required e.g.**COR/L8/4900/4**

= Cora, L8 Forward Lens, 4867lm, 53W, 4000K

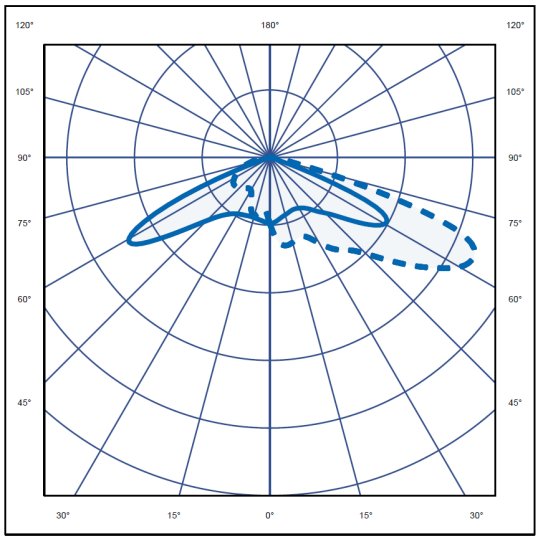

L8 Forward Flood Lens

Part No.	Lm	W	CRI	Surge Protection
COR/L8/3600/4	3648	38	80	6kV
COR/L8/4900/4	4867	53	80	6kV
COR/L8/6700/4	6705	79	80	6kV

L2 Wide Flood Lens

Part No.	Lm	W	CRI	Surge Protection
COR/L2/3200/4	3226	38	80	6kV
COR/L2/4300/4	4283	53	80	6kV
COR/L2/5800/4	5785	79	80	6kV