
Hallie 162 Downlighter



- Efficacies up to 167lm/W
- IP54 dust and water resistant
- Nominal life-time of 60,000h (L80/B10)
- Colour stability with 3 step MacAdam
- CRI > 80 as standard
- Emergency BLF = 334lm
- Low Glare Design

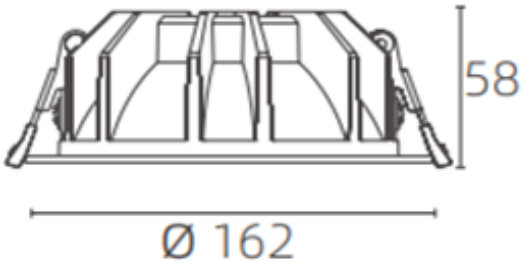


To Specify:

Select Part Number with additional options if required
e.g.**HAL/162/587/4/BLK/ST**

= Hallie downlight, 587 lumens, 4W, 60°, 4000K, IP20, BLACK, non-dimmable c/w self-test emergency

Part No.	W	lm	lm/W	Colour
HAL/162/587/4/BLK	4	587	158	Black
HAL/162/1148/4/BLK	7	1148	153	Black
HAL/162/2183/4/BLK	15	2183	144	Black
HAL/162/3096/4/BLK	23	3096	136	Black
HAL/162/621/4/WHI	4	621	167	White
HAL/162/1215/4/WHI	7	1215	162	White
HAL/162/2310/4/WHI	15	2310	152	White
HAL/162/3276/4/WHI	23	3276	144	White

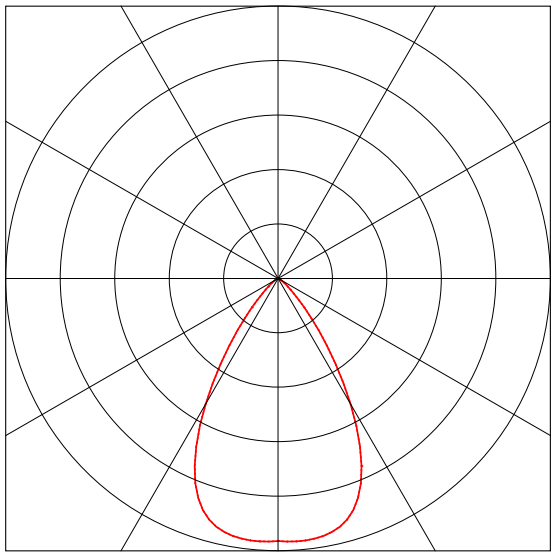

Options

For DALI dimmable suffix	**/DIM**
For Casambi enabled suffix	**/CAS**
For 3hr emergency suffix	**/EMR**
For self-test emergency suffix	**/ST**
For DALI addressable emergency suffix	**/EMP**
For Wireless addressable emergency suffix	**/WAE**