
LED3 Surface Emergency Downlight





- Suitable for surface and BESA mounting applications
- IP20 suitable for internal environments
- CCT 5700K
- High Output - Up to 268 Delivered Lumen
- Features Extra Long Life LiFePO4 Batteries
- Weight Square = 0.40kg / Dali - 0.42kg
- Weight Round = 0.37kg / Dali = 0.40kg

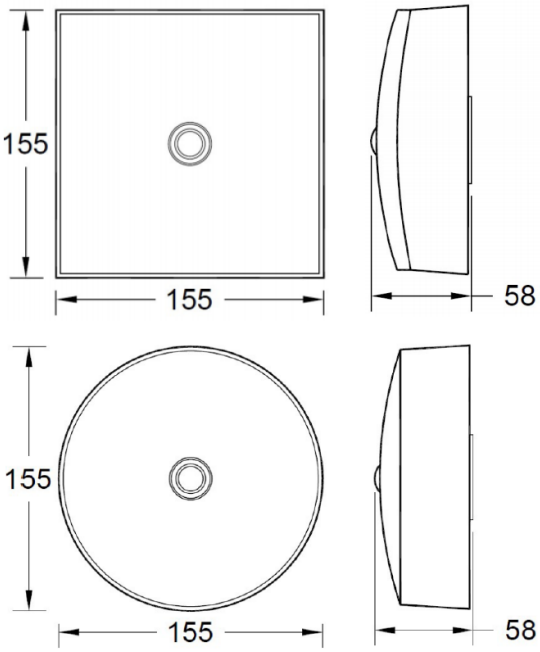

To Specify:


Select Part Number with additional options if required
e.g. **LED3/CIR/WHI/OA/ST**

= LED3 Circular White Bulkhead, Open Area optic c/w 3hr Monitor Self-test Emergency


Open Area Spacing Table

Mounting Height	To Wall 0.5 Lux	To Wall 1.0 Lux	Between Fittings 0.5 Lux	Between Fittings 1.0 Lux
2.5m	5.4m	4.5m	12.6m	10.7m
3.0m	5.9m	4.7m	14.0m	11.7m
4.0m	6.6m	-	16.2m	13.2m
5.0m	0.3m	-	17.8m	0.7m

Open Area

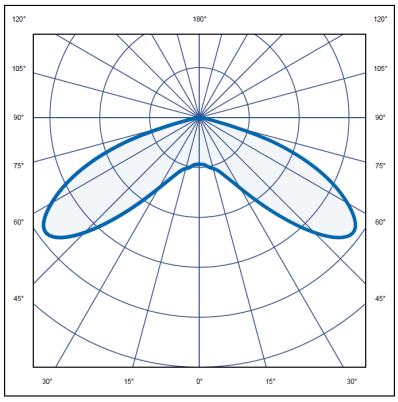

Corridor

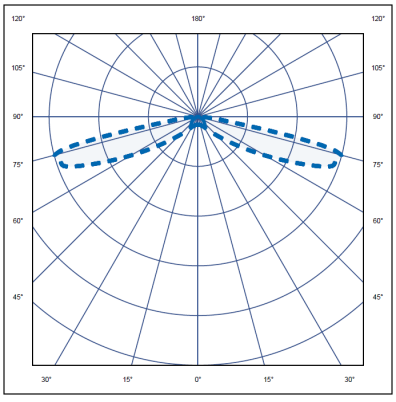

Options

For white (RAL 9016) finish suffix	**/WHI**
For black (RAL 9005) finish suffix	**/BLK**
For open area optic suffix	**/OA**
For corridor optic suffix	**/COR**
For remote battery suffix	**/REM**
For self test suffix	**/ST**
For Dali suffix	**/EMP**
For Wireless addressable emergency suffix	**/WAE**