
Louis Recessed Modular



- Efficacies up to 127lm/W
- Emergency BLF = 316lm
- 100,000 hour life expectancy (L80, B10)
- IP40 front, IP20 back as standard, IP65 also available
- Impact Rating of IK04
- High colour rendering index CRI > 80
- Colour stability with 3 step MacAdam
- LG7 compliant
- UGR < 19
- 1200 x 300 & 1200 x 600 also available
- TP(a) rated

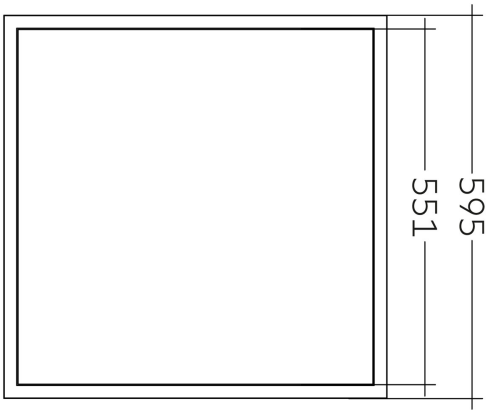


To Specify:

Select Part Number with additional options if required e.g. **LOU/66/3300/4/TPA/DIM/ST**

= Louis 600mm x 600mm Premium Panel, 25w, 3325 lumens, 4000K, DALI dimmable c/w self-test Emergency

Part No.	W	Lm	lm/W	CCT
LOU/66/2000/4/TPA	17	2099	127	4000K
LOU/66/3000/4/TPA	25	3078	121	4000K
LOU/66/3300/4/TPA	28	3320	120	4000K
LOU/66/3600/4/TPA	30	3561	119	4000K
LOU/66/3800/4/TPA	32	3798	118	4000K
LOU/66/4000/4/TPA	35	4039	117	4000K
LOU/66/4400/4/TPA	37	4279	116	4000K
LOU/66/4500/4/TPA	39	4521	115	4000K

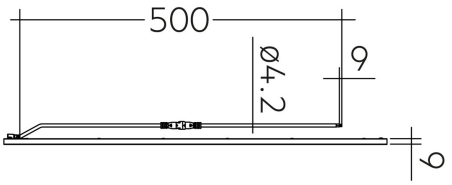

Options

For surface option suffix (recessed is standard)	**/SF**
For DALI dimmable suffix	**/DIM**
For 3hr emergency suffix	**/EMR**
For 3hr self-test emergency suffix	**/ST**
For 3hr DALI emergency suffix	**/EMP**
For Casambi enabled suffix	**/CAS**
For wireless addressable emergency suffix	**/WAE**
For Casambi Sensor	**/SEN/CAS**

