



Millie Surface Opal System

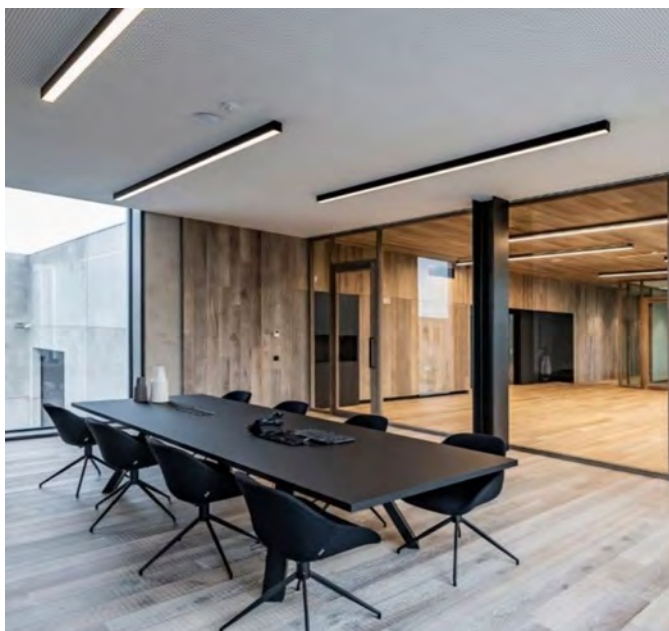

- Body and gear tray – aluminium extrusion
- IP20 as standard, IP44 available on request
- Efficacy of up to 161lm/W
- Nominal life-time of 100,000 h (L80/B10)
- Colour stability with 3 step MacAdam
- Opal frosted diffuser – polycarbonate TP(a)
- Optics – PMMA TP(b)
- Modular optics – shade polycarbonate, optic – PMMA
- Colours: RAL 9003 White, RAL 9005 Black & RAL 9006 Grey
- Lengths available: 570mm, 850mm, 1130mm, 1410mm, 1690mm, 1970mm, 2250mm, 2530mm, 2810mm, 3090mm, 3370mm
- Opal Emergency BLF = 416lm
- 90° Emergency BLF = 430lm

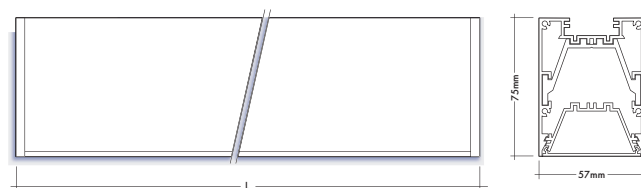

To Specify:


Select Part Number with additional options if required
e.g. **MIL/S/16/OP/3925/4/BLK/DIM**

= Millie, Surface, 1690mm, Opal, 3925lm, 28W, 4000K, Black RAL 9005 finish, DALI dimmable

Part No.	Lm	W	Lm/W	BLF	Weight	L (mm)
MIL/S/11/OP/1307/4	1307	9	140	413	2.6kg	1130
MIL/S/11/OP/2616/4	2616	19	137	413	2.6kg	1130
MIL/S/11/OP/3836/4	3836	29	132	413	2.6kg	1130
MIL/S/16/OP/1961/4	1961	14	136	416	3.8kg	1690
MIL/S/16/OP/3925/4	3925	28	137	416	3.8kg	1690
MIL/S/16/OP/5753/4	5753	43	132	416	3.8kg	1690
MIL/S/22/OP/2614/4	2614	18	140	417	5.2kg	2250
MIL/S/22/OP/5232/4	5232	38	137	417	5.2kg	2250
MIL/S/22/OP/7671/4	7671	58	132	417	5.2kg	2250

Options


For 4000K suffix /4
 For 3000K suffix /3
 For white finish suffix /WHI
 For black finish suffix /BLK
 For grey finish suffix /GRY
 For Casambi enabled suffix /CAS
 For DALI Dimmable suffix /DIM
 For wireless DALI suffix /WD
 For 3hr integral emergency suffix /EMR
 For 3hr self-test emergency suffix /ST
 For DALI addressable emergency suffix /EMP
 For wireless DALI addressable emergency suffix /WAE
 For 90° low glare optic /90
 For Asymmetric wall wash optic /AS
 For Double asymmetric optic /DA
 Integral Sensor /SEN

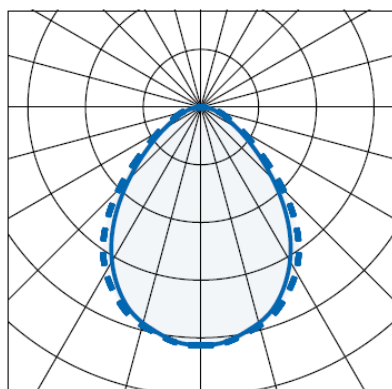


Accessories

Suspended / Surface end cap /MIL/ECR
 Wire suspension kit (2m) /MIL/WIRE
 Wall mounting bracket /MIL/WALL
 Coupler /MIL/CPLR


Fitting Lengths (mm)

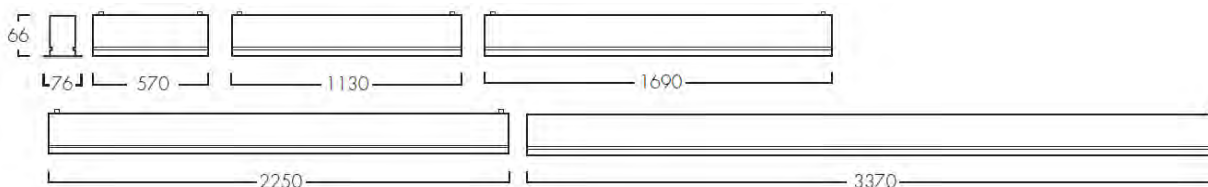

Millie Surface Microprismatic System

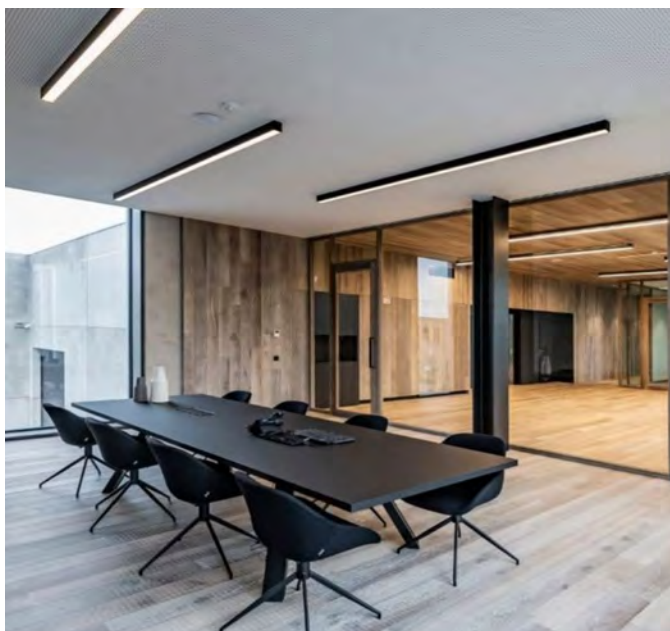

- Body and gear tray – aluminium extrusion
- IP20 as standard, IP44 available on request
- Efficacy of up to 161lm/W
- Nominal life-time of 100,000 h (L80/B10)
- Colour stability with 3 step MacAdam
- Opal frosted diffuser – polycarbonate TP(a)
- Optics – PMMA TP(b)
- Modular optics – shade polycarbonate, optic – PMMA
- Colours: RAL 9003 White, RAL 9005 Black & RAL 9006 Grey
- Lengths available: 570mm, 850mm, 1130mm, 1410mm, 1690mm, 1970mm, 2250mm, 2530mm, 2810mm, 3090mm, 3370mm
- Opal Emergency BLF = 416lm
- 90° Emergency BLF = 430lm

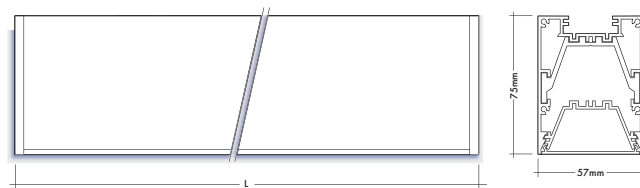

To Specify:


Select Part Number with additional options if required
e.g. **MIL/S/22/MP/2544/4/BLK/DIM**

= Millie, Surface, 2250mm, Microprismatic, 2544lm, 18W, 4000K,
Black RAL 9005 finish, DALI dimmable

Part No.	Lm	W	Lm/W	Weight	L (mm)
MIL/S/11/MP/1272/4	1272	9	136	2.6kg	1130
MIL/S/11/MP/2546/4	2546	19	133	2.6kg	1130
MIL/S/11/MP/3732/4	3732	29	128	2.6kg	1130
MIL/S/16/MP/1908/4	1908	14	132	3.8kg	1690
MIL/S/16/MP/3819/4	3819	28	133	3.8kg	1690
MIL/S/16/MP/5598/4	5598	43	128	3.8kg	1690
MIL/S/22/MP/2544/4	2544	18	136	5.2kg	2250
MIL/S/22/MP/5091/4	5091	38	133	5.2kg	2250
MIL/S/22/MP/7464/4	7464	58	128	5.2kg	2250

Options


For 4000K suffix /4
 For 3000K suffix /3
 For white finish suffix /WHI
 For black finish suffix /BLK
 For grey finish suffix /GRY
 For Casambi enabled suffix /CAS
 For DALI Dimmable suffix /DIM
 For wireless DALI suffix /WD
 For 3hr integral emergency suffix /EMR
 For 3hr self-test emergency suffix /ST
 For DALI addressable emergency suffix /EMP
 For wireless DALI addressable emergency suffix /WAE
 For 90° low glare optic /90
 For Asymmetric wall wash optic /AS
 For Double asymmetric optic /DA
 Integral Sensor /SEN

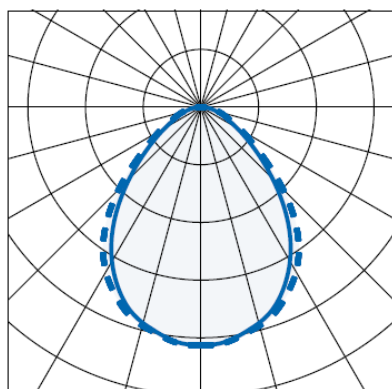

Accessories

Suspended / Surface end cap /MIL/ECR
 Wire suspension kit (2m) /MIL/WIRE
 Wall mounting bracket /MIL/WALL
 Coupler /MIL/CPLR


Fitting Lengths (mm)

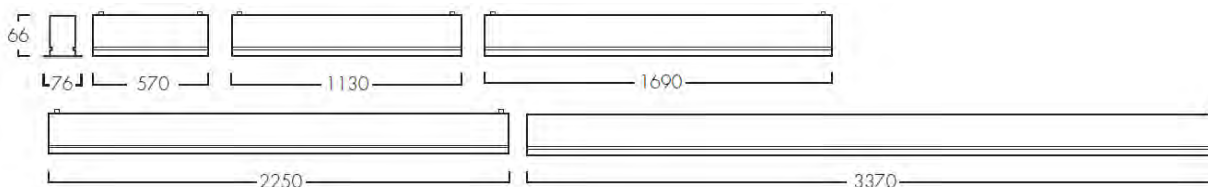

Millie Surface Asymmetric System



- Body and gear tray – aluminium extrusion
- IP20 as standard, IP44 available on request
- Efficacy of up to 150lm/W
- Nominal life-time of 100,000 h (L80/B10)
- Colour stability with 3 step MacAdam
- Asymmetric wall wash optic
- Colours: RAL 9003 White, RAL 9005 Black & RAL 9006 Grey
- Lengths available: 570mm, 850mm, 1130mm, 1410mm, 1690mm, 1970mm, 2250mm, 2530mm, 2810mm, 3090mm, 3370mm
- Opal Emergency BLF = 416lm
- 90° Emergency BLF = 430lm

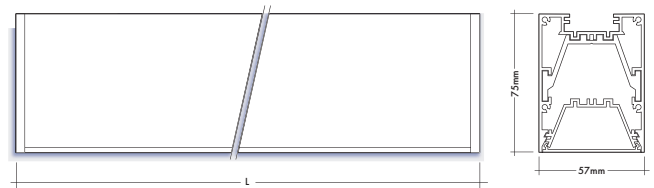


To Specify:

Select Part Number with additional options if required
 e.g. **MIL/S/16/AS/3260/4/BLK/DIM**
 = Millie, Surface, 1690mm, Asymmetric, 3260lm, 22W, 4000K, Black
 RAL 9005 finish, DALI dimmable

Part No.	Lm	W	Lm/W	BLF	Weight	L (mm)
MIL/S/11/AS/1420/4	1424	11	132	413	2.6kg	1130
MIL/S/11/AS/2830/4	2827	20	142	413	2.6kg	1130
MIL/S/11/AS/3480/4	3484	25	141	413	2.6kg	1130
MIL/S/14/AS/1970/4	1970	14	141	416	3.2kg	1410
MIL/S/14/AS/2710/4	2708	18	150	416	3.2kg	1410
MIL/S/16/AS/2140/4	2145	15	143	416	3.8kg	1690
MIL/S/16/AS/3260/4	3260	22	148	417	3.8kg	1690
MIL/S/16/AS/4410/4	4411	29	152	417	3.8kg	1690
MIL/S/16/AS/5330/4	5325	36	148	417	3.8kg	1690

Options

For 4000K suffix /4
 For 3000K suffix /3
 For white finish suffix /WHI
 For black finish suffix /BLK
 For grey finish suffix /GRY
 For Casambi enabled suffix /CAS
 For DALI Dimmable suffix /DIM
 For wireless DALI suffix /WD
 For 3hr integral emergency suffix /EMR
 For 3hr self-test emergency suffix /ST
 For DALI addressable emergency suffix For /EMP
 For wireless DALI addressable emergency /WAE
 Integral Sensor /SEN

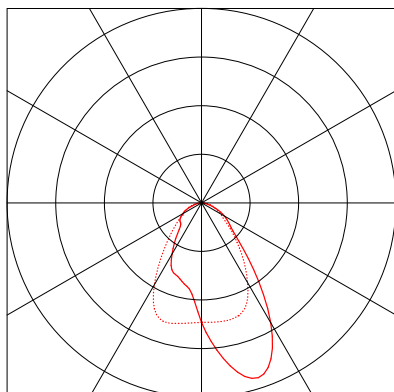

Accessories

Suspended / Surface end cap /MIL/ECR
 Wire suspension kit (2m) /MIL/WIRE
 Wall mounting bracket /MIL/WALL
 Coupler /MIL/CPLR

Fitting Lengths (mm)

