
NovaP Suspended



- IP20 suitable for internal environments
- Efficacy of up to 115lm/W
- Nominal life-time of 100,000h (L80/B10)
- Colour stability with 3 step MacAdam
- High colour rendering index CRI > 80
- Available in 50mm diameter
- Remote driver

To Specify:
Select Part Number with additional options if required e.g. **NOVA/P/35/33350/3**
= Nova T Suspended luminaire, 33350lm, 289W, 3000K

Part No.	W	lm	lm/W	Diameter
NOVA/P/35/33350/3	289	33350	115	3500

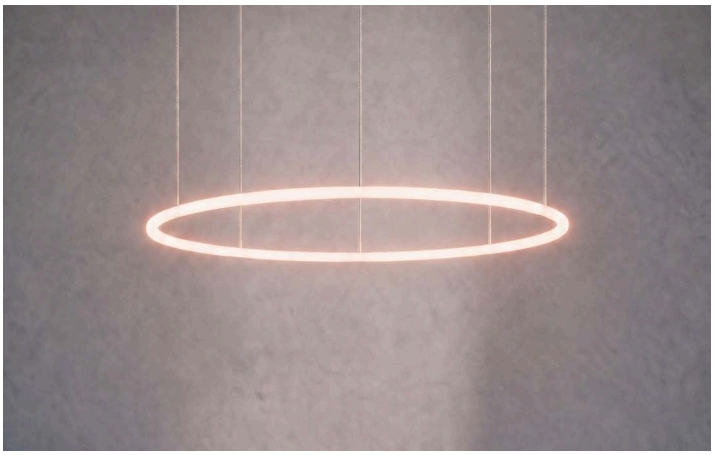