

NovaT Suspended

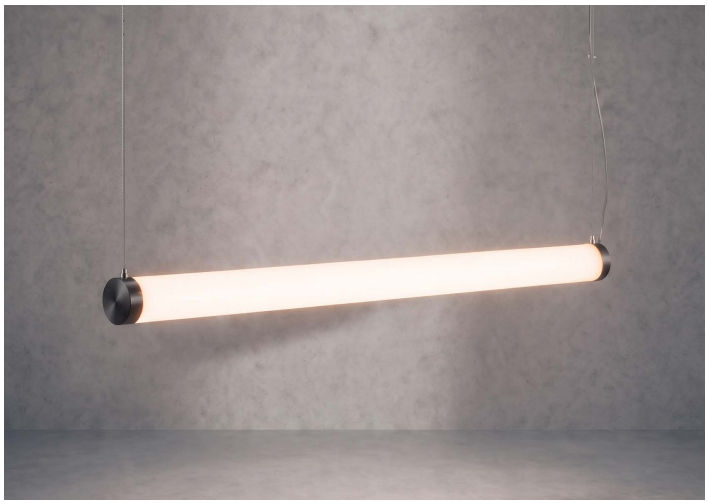

- IP20 suitable for internal environments
- Efficacy of up to 104lm/W
- Nominal life-time of 70,000h (L80/B10)
- Colour stability with 3 step MacAdam
- High colour rendering index CRI > 80
- Available in 50mm and 70mm diameter
- Remote driver
- RGB available on request

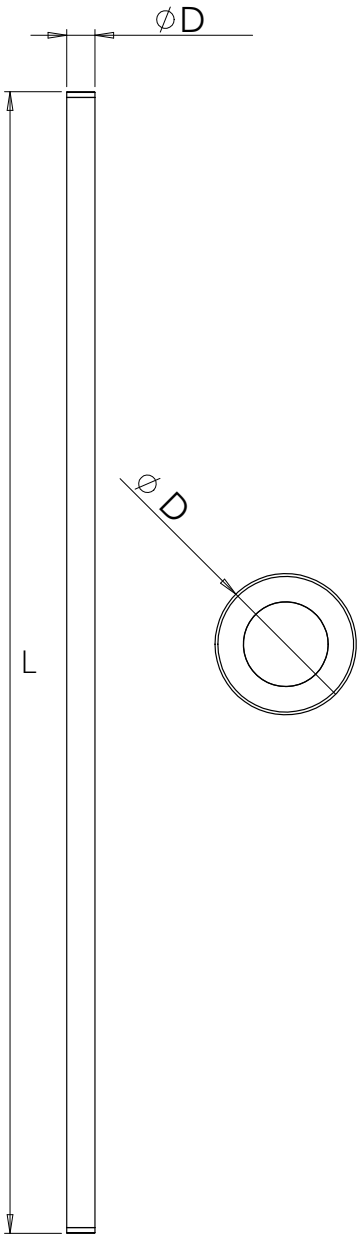

To Specify:
Select Part Number with additional options if required e.g. **NOVA/T/50D/24/12960/3**

= Nova T Suspended luminaire, 50mm diameter, 2400mm, 12960lm, 125W, 3000K

Part No.	W	lm	lm/W	Length
NOVA/T/D*/14/7560/3	73	7560	104	1400
NOVA/T/D*/15/8100/3	78	8100	104	1500
NOVA/T/D*/16/8640/3	84	8640	104	1600
NOVA/T/D*/17/9180/3	89	9180	104	1700
NOVA/T/D*/18/9720/3	94	9720	104	1800
NOVA/T/D*/24/12960/3	125	12960	104	2400