


Indoor Lighting

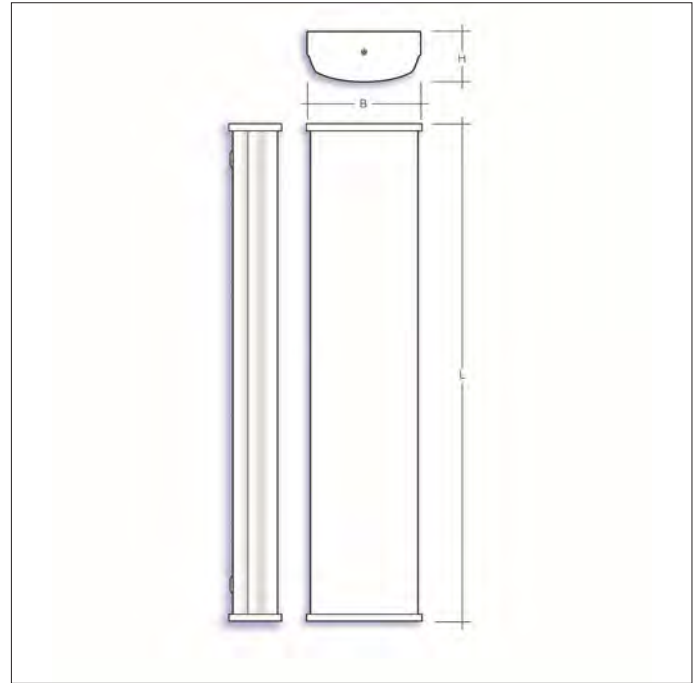

Key features

- IP40 suitable for indoor environments
- Impact rating of IK08
- Efficacy of up to 143lm/W
- Nominal life-time of > 72,000 h (L80/B10)
- Colour stability with 3 step MacAdam
- High colour rendering index CRI > 80
- Emergency BLF = 445 lm

Options

- For DALI dimmable suffix: /DIM
- For Casambi enabled suffix: /CAS
- For 3hr emergency suffix: /EMR
- For self-test emergency suffix: /ST
- For DALI addressable emergency suffix: /EMP

i.e. **ALEX/5/3470/4/DIM/EMR** =
ALEX LED surface luminaire, 3470lm, 24W, 4000K,
Dali Dimmable c/w 3hr emergency.

Part No.	W	Lm	Lm/W	L	H	B
ALEX/4/1340/4	11	1343	121	1200	70	170
ALEX/4/2640/4	20	2640	132	1200	70	170
ALEX/4/3890/4	30	3886	131	1200	70	170
ALEX/4/5020/4	39	5023	128	1200	70	170
ALEX/4/6150/4	50	6148	123	1200	70	170
ALEX/5/1870/4	13	1875	143	1480	70	170
ALEX/5/3470/4	24	3470	143	1480	70	170
ALEX/5/5090/4	36	5090	140	1480	70	170
ALEX/5/6560/4	48	6557	136	1480	70	170
ALEX/5/7990/4	62	7989	129	1480	70	170

